


Uponor S-Press PLUS tap elbow mount.Unit Gemini 16-Rp1/2"FT c/c120mm

1070663

- Rotation protected installed on mounting angel

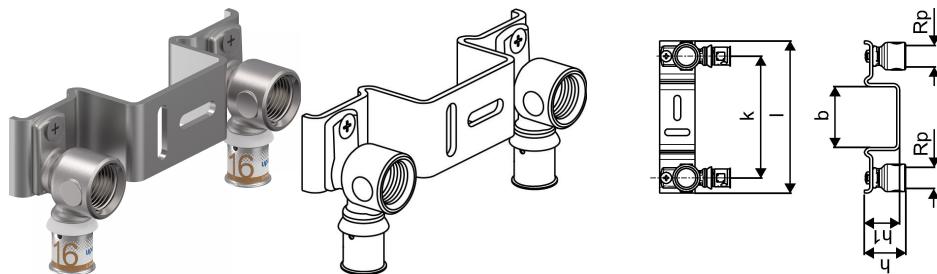

About Uponor S-Press PLUS tap elbow mount.Unit Gemini

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass
if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm


-2101339 : Manifolds and adapters

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS tap elbow mount.Unit Gemini 16-Rp1/2"FT c/c120mm

1070663

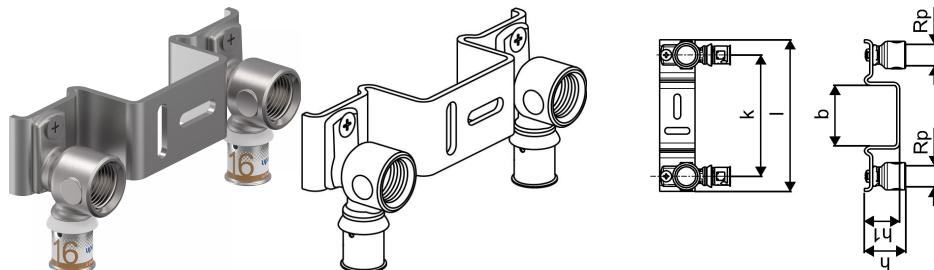

Measurements

Female thread Rp	0,5
LENGTH_L	150
Z Measurement b	60
Z Measurement h	41
Z Measurement h1	35
Z Measurement k	120

Product code

Item no EAN	6414905219797
Item no GF	35001070663
Item no GTIN	06414905219797

Dimensions

Item Unit Height	41
Item Unit Length	150
Item Unit Weight	0,407
Item Unit Width	70
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905288687
Packaging GTIN PL4	06414905288694
Packaging Height PL1	185
Packaging Height PL4	699
Packaging Length PL1	185
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	720
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,0031487
Packaging Volume PL4	0,67104
Packaging Weight PL1	2,095
Packaging Weight PL4	325,68
Packaging Width PL1	92
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb