


Uponor S-Press PLUS tap elbow mount. Unit Gemini 16-Rp1/2"FT c/c150mm

1070664

- Rotation protected installed on mounting angel

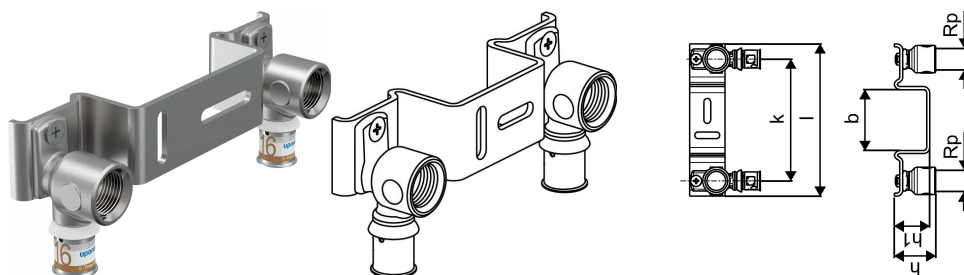

About Uponor S-Press PLUS tap elbow mount. Unit Gemini

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm


-2101339 : Manifolds and adapters

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS tap elbow mount. Unit Gemini 16-Rp1/2"FT c/c150mm

1070664

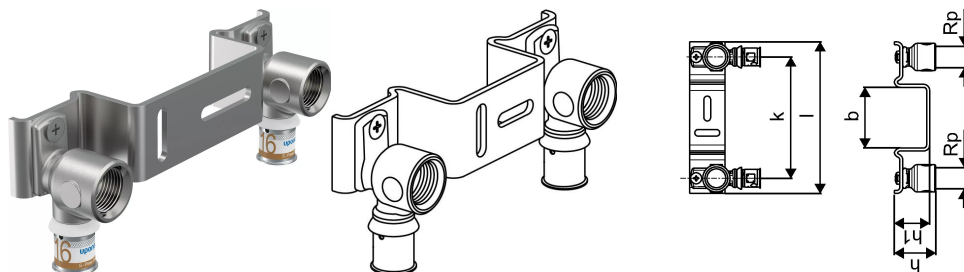

Measurements

Female thread Rp	0,5
LENGTH_L	180
Z Measurement b	90
Z Measurement h	41
Z Measurement h1	35
Z Measurement k	150

Product code

Item no EAN	6414905219803
Item no GF	35001070664
Item no GTIN	06414905219803
Item no VVS	045401416

Dimensions

Item Unit Height	41
Item Unit Length	180
Item Unit Weight	0,429
Item Unit Width	70
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

Packaging

Packaging GTIN PL1	06414905288700
Packaging GTIN PL4	06414905288717
Packaging Height PL1	185
Packaging Height PL4	699
Packaging Length PL1	185
Packaging Length PL4	1200

Packaging Quantity PL1	5
Packaging Quantity PL4	720
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0031487
Packaging Volume PL4	0,67104
Packaging Weight PL1	2,205
Packaging Weight PL4	341,52
Packaging Width PL1	92
Packaging Width PL4	800

Technical documents

[Download documents here](#) 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb