


Uponor S-Press PLUS mount. Unit sound p. 16-Rp1/2"FT c/c150mm

1070666

- Tap elbow assembly
- Installed on mounting angle with rotation protection, integrated sound protection and incl. drainage function
- Sound protection according to VDI 4100 SST 1 / SST 2 / SST 3* (* for drywall installation) and DIN 4109
- Drainage of possible leakage water according to DIN 18534

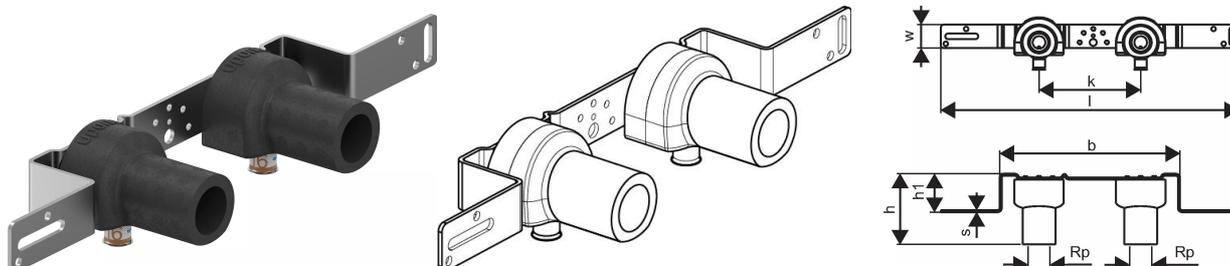

About Uponor S-Press PLUS mount. Unit sound p.

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press PLUS mount. Unit sound p. 16-Rp1/2"FT c/c150mm

1070666

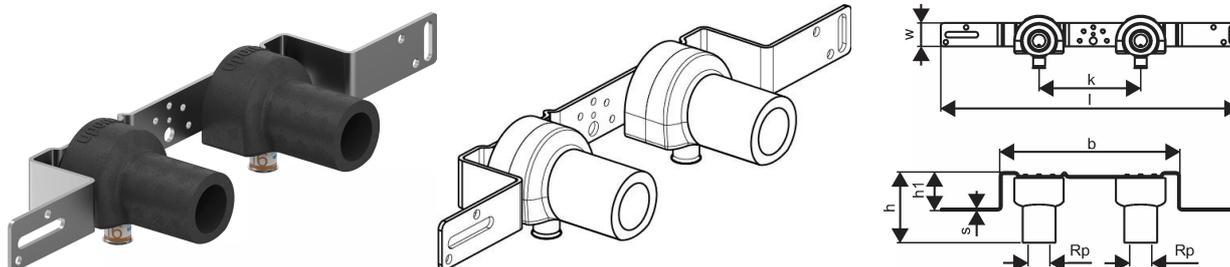

Measurements

Female thread Rp	0,5
LENGTH_L	440
Z Measurement b	266
Z Measurement h	105
Z Measurement h1	57
Z Measurement k	150

Product code

Item no EAN	6414905219827
Item no GF	35001070666
Item no GTIN	06414905219827

Dimensions

Item Unit Height	105
Item Unit Length	440
Item Unit Weight	0,754
Item Unit Width	70
Item_UOM	pce

Status

MTO (longer delivery times)

Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905663187
Packaging GTIN PL4	06414905663606
Packaging Height PL1	110
Packaging Height PL4	1090
Packaging Length PL1	450
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	150

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0198
Packaging Volume PL4	1,0464
Packaging Weight PL1	3,8
Packaging Weight PL4	120
Packaging Width PL1	400
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb