


Uponor S-Press PLUS radi elbow adapter unplated 16-15CU l=250mm

1070677

- Made of DR-brass
- With copper pipe 15 x 1 mm
- The connection of the copper pipe 15 x 1 mm to the radiator can be made with the Uponor clamp compression adapter Cu (Item-No. 1013830).

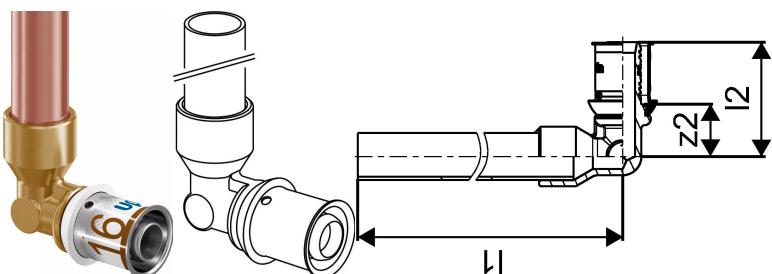

About Uponor S-Press PLUS radi elbow adapter unplated

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass
if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

-2101339 : Manifolds and adapters

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS radi elbow adapter unplated 16-15CU l=250mm 1070677

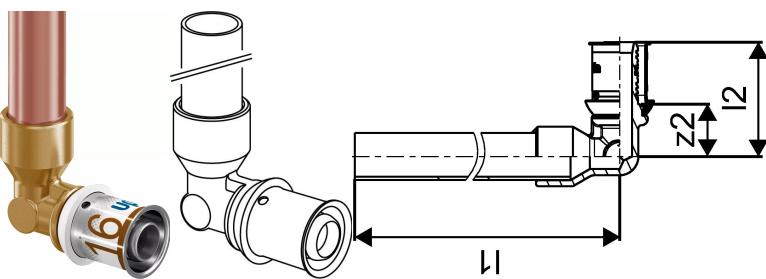

Product code

Item no EAN 6414905219933

Item no GF 35001070677

Item no GTIN 06414905219933

Item no RSK 1896564

Dimensions

Item Unit Height 46

Item Unit Length 276,6

Item Unit Weight 0,1

Item Unit Width 21,9

Item_UOM pce

Measurements

Length (l1) 266

Length (l2) 36,5

Z2 16,7

Packaging

Packaging GTIN PL1 06414905286874

Packaging GTIN PL4 06414905286881

Packaging Height PL1 80

Packaging Height PL4 704

Packaging Length PL1 395

Packaging Length PL4 1200

Packaging Quantity PL1 20

Packaging Quantity PL4 1680

Packaging Type PL1 Base_Box

Packaging Type PL4 Pallet

Packaging Volume PL1 0,00632

Packaging Volume PL4 0,67584

Packaging Weight PL1	2,122
Packaging Weight PL4	202,248
Packaging Width PL1	200
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb