


Uponor S-Press PLUS radi elbow adapter plated 16-15CU l=350mm

1070678

- Made of plated brass
- With copper pipe 15 x 1 mm, plated.
- The connection of the plated copper pipe 15 x 1 mm to the radiator can be made using a standard compression fitting

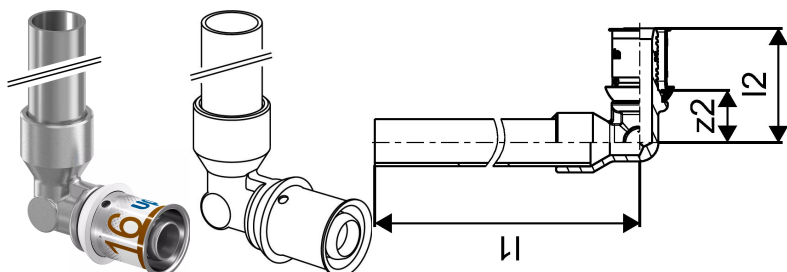

About Uponor S-Press PLUS radi elbow adapter plated

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Unless specified otherwise, male and female threads acc.to EN 10226-1.

Certification

- WRAS
- DVGW
- KIWA

Uponor S-Press PLUS radi elbow adapter plated 16-15CU l=350mm

1070678

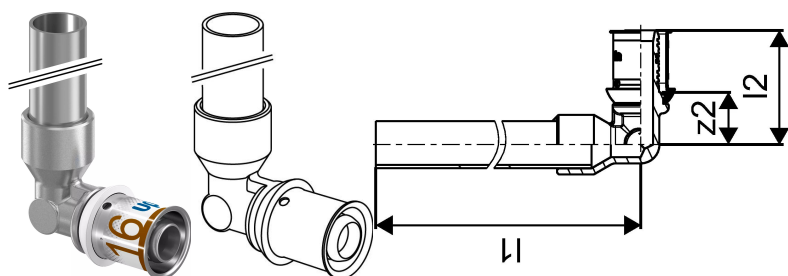

Technical data

Item Quantity 1	20
Item Quantity 2	1680
Item (unit of measurement)	pce
Outside diameter	16 mm
Length (l1)	366 mm
Length (l2)	37 mm
z1	17 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb