


Uponor S-Press PLUS radi elbow adapter plated 16-15CU l=1000mm 1070679

- With copper pipe 15 x 1 mm and 22 x 1 mm, plated.
- The connection of the plated copper pipe 15 x 1 mm to the radiator can be made with the Uponor clamp compression adapter Cu (Item-No. 1013830).

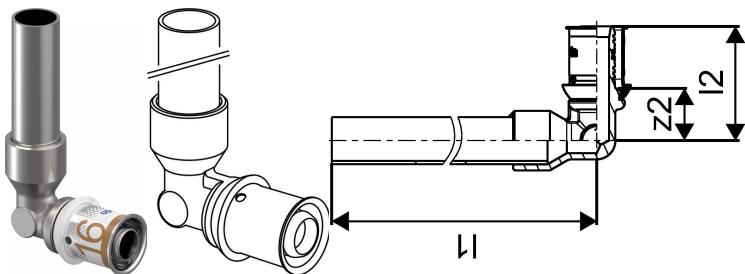

About Uponor S-Press PLUS radi elbow adapter plated

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

-2101339 : Manifolds and adapters

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS radi elbow adapter plated 16-15CU l=1000mm 1070679

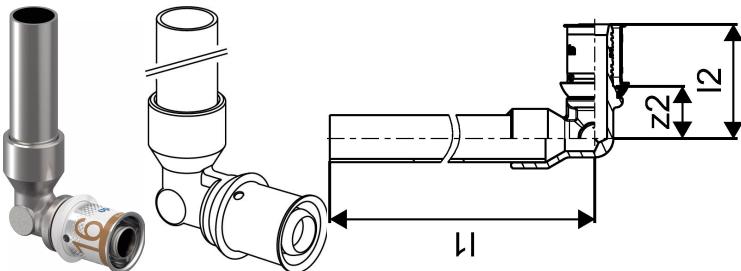

Product code

Item no EAN	6414905219957
Item no GF	35001070679
Item no GTIN	06414905219957
Item no RSK	1896566
Item no VVS	404730036

Dimensions

Item Unit Height	46
Item Unit Length	1126.6
Item Unit Weight	0,428
Item Unit Width	21.9
Item_UOM	pce

Measurements

Length (l1)	1116
Length (l2)	36,5
Z2	16,7

Technical data

Recycling Text Block PL1	Corrugated fibreboard
--------------------------	-----------------------

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

Packaging

Packaging GTIN PL1	06414905286942
Packaging GTIN PL4	06414905286959
Packaging Height PL1	80
Packaging Height PL4	544
Packaging Length PL1	1150
Packaging Length PL4	1200
Packaging Material (number) PL1	20

Packaging Material PL1	Corrugated fibreboard
Packaging Material (short) PL1	PAP
Packaging Quantity PL1	20
Packaging Quantity PL4	400
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0184
Packaging Volume PL4	0,52224
Packaging Weight PL1	8,87
Packaging Weight PL4	201,4
Packaging Width PL1	200
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb