
Product data sheet



GF Uponor S-Press PLUS radi elbow adapter, plated 16-15CU l=1000

1070679

- With plated copper pipe (EN 1057) 15 x 1 mm or 22 x 1 mm
- Connection of the plated copper pipe can be made using a standard BS EN 1254-2 compression type fitting,
- or a compatible metal press connection.

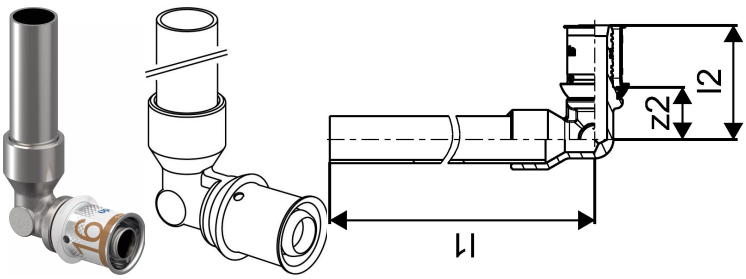

About GF Uponor S-Press PLUS radi elbow adapter, plated

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS radi elbow adapter, plated 16-15CU l=1000

1070679

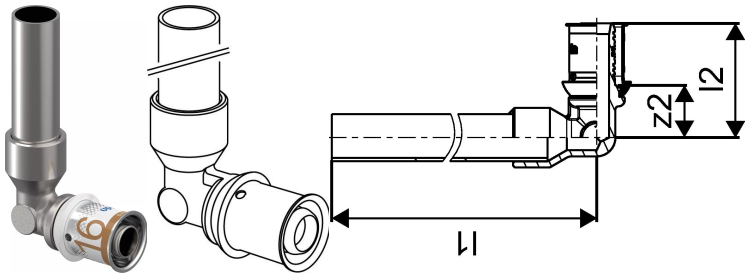

Product code

Item no EAN	6414905219957
Item no GF	35001070679
Item no GTIN	06414905219957
Item no RSK	1896566
Item no VVS	404730036

Dimensions

Item Unit Height	46
Item Unit Length	1126.6
Item Unit Weight	0,428
Item Unit Width	21.9
Item_UOM	pce

Measurements

Length (l1)	1116
Length (l2)	36,5
Z2	16,7

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905286942
Packaging GTIN PL4	06414905286959
Packaging Height PL1	80
Packaging Height PL4	544
Packaging Length PL1	1150
Packaging Length PL4	1200
Packaging Material (number) PL1	20

Packaging Material PL1	Corrugated fibreboard
Packaging Material (short) PL1	PAP
Packaging Quantity PL1	20
Packaging Quantity PL4	400
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0184
Packaging Volume PL4	0,52224
Packaging Weight PL1	8,87
Packaging Weight PL4	201,4
Packaging Width PL1	200
Packaging Width PL4	800

Technical data

Recycling Text Block PL1	Corrugated fibreboard

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+