


Uponor S-Press PLUS tap elbow mount. Unit radi 16-Rp1/2"FT c/c50mm

1070684

- Pre-mounted unit contains of two Uponor S-Press PLUS Smart Aqua tap elbows 16-1/2FT
- Rotation protected installed on mounting angle.

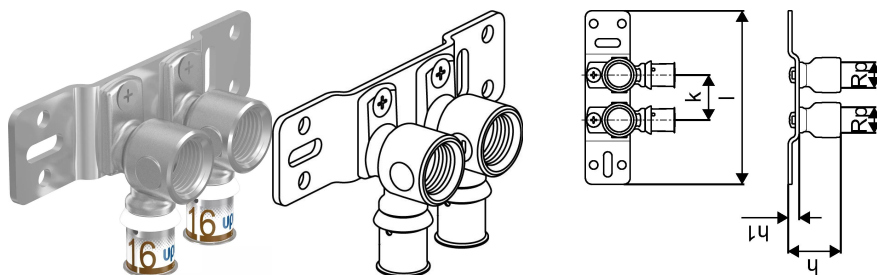

About Uponor S-Press PLUS tap elbow mount. Unit radi

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press PLUS tap elbow mount. Unit radi 16-Rp1/2"FT c/c50mm

1070684

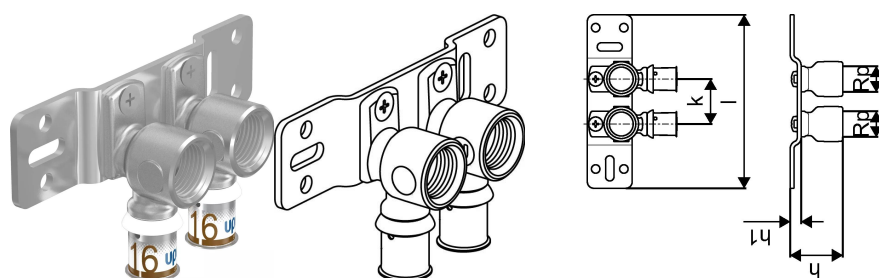

Measurements

Female thread Rp	0,5
LENGTH_L	150
Z Measurement h	41
Z Measurement h1	8,5
Z Measurement k	50

Product code

Item no EAN	6414905220007
Item no GF	35001070684
Item no GTIN	06414905220007
Item no VVS	404730216

Dimensions

Item Unit Height	41
Item Unit Length	149.9
Item Unit Weight	0,352
Item Unit Width	70
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905288373
Packaging GTIN PL4	06414900307833
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	1,799
Packaging Weight PL4	370,4
Packaging Width PL1	135
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb