
Product data sheet




GF Uponor S-Press PLUS radi crossing, insulated 16-16-16

1070689

- For cross-over-free connection of a radiator on the raw floor
- Incl. insulation box, consisting of upper and lower part made of EPP (expanded polypropylene) with 13 mm insulation layer
- (corresponds to 50 % insulation in compliance with EnEV), WLG 035. Meets EnEV requirements in respect of pipe
- cross-overs and wall penetrations.
- Dimensions of insulation box
- (L x W x H): 115 x 115 x 55 mm.



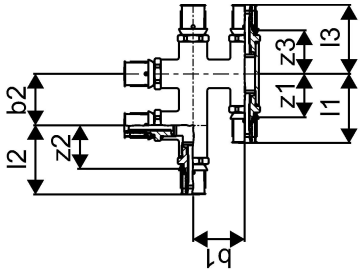

About GF Uponor S-Press PLUS radi crossing, insulated

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS radi crossing, insulated 16-16-16

1070689



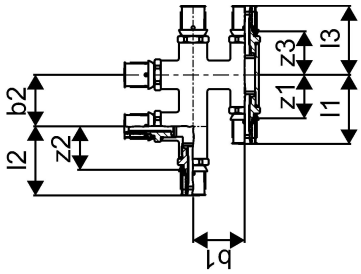

Product code

Item no EAN	6414905220052
Item no GF	35001070689
Item no GTIN	06414905220052
Item no RSK	2194837

Dimensions

Item Unit Height	56
Item Unit Length	147
Item Unit Weight	0,57
Item Unit Width	131.5
Item_UOM	pce

Measurements

Length (l1)	53,5
Length (l2)	53,5
Length (l3)	53,5
Wall thickness_s	40
Z Measurement b1	40
Z Measurement b2	40
z1	33,7
Z2	33,7
Z3	33,7

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905469000
Packaging GTIN PL4	06414905499939

Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	192
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,65
Packaging Weight PL4	148,8
Packaging Width PL1	135
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+