


## Uponor S-Press PLUS radi crossing insulated 20-16-16

**1070690**

- For cross-over-free connection of a radiator on the raw floor
- Incl. insulation box, consisting of upper and lower part made of EPP (expanded polypropylene) with 13 mm insulation layer
- (corresponds to 50 % insulation in compliance with EnEV), WLG 035. Meets EnEV requirements in respect of pipe
- cross-overs and wall penetrations.
- Dimensions of insulation box
- (L x W x H): 115 x 115 x 55 mm.

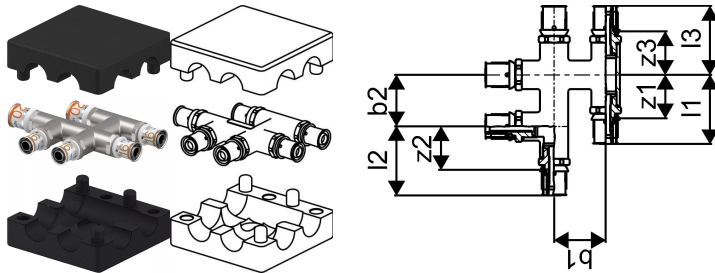

## About Uponor S-Press PLUS radi crossing insulated

### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS radi crossing insulated 20-16-16

1070690

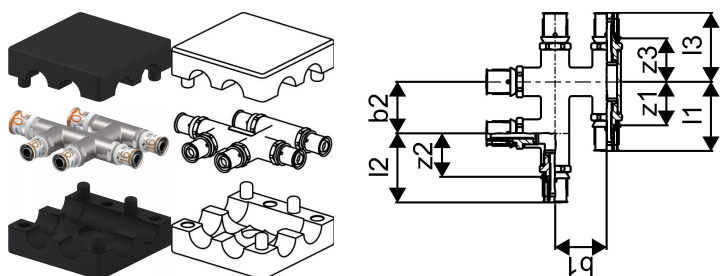

### Product code

Item no EAN	6414905220069
Item no GF	35001070690
Item no GTIN	06414905220069
Item no RSK	2194838

### Dimensions

Item Unit Height	56
Item Unit Length	148.5
Item Unit Weight	0,574
Item Unit Width	131.5
Item_UOM	pce

### Measurements

Length (l1)	56
Length (l2)	56
Length (l3)	55
Wall thickness_s	40
Z Measurement b1	40
Z Measurement b2	40
z1	33,7
Z2	33,7
Z3	33,7

### Status

MTO (longer delivery times)

Item available on request, minimum lead time 2 weeks

### Packaging

Packaging GTIN PL1	06414905469017
Packaging GTIN PL4	06414905499946
Packaging Height PL1	89
Packaging Height PL4	678

Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	192
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,654
Packaging Weight PL4	149,568
Packaging Width PL1	135
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)