


## Uponor S-Press PLUS baseboard adapter 16-G1/2"MT-16

**1070693**

- For baseboard mounting and the universal connection of Uponor MLC and Unipipe PLUS pipes with outside diameters 16 and 20 mm to valve radiators with connection from the bottom
- Thread acc. to EN ISO 228-1

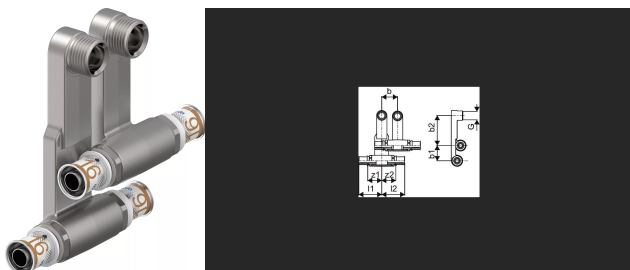

### About Uponor S-Press PLUS baseboard adapter

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

## Uponor S-Press PLUS baseboard adapter 16-G1/2"MT-16

1070693

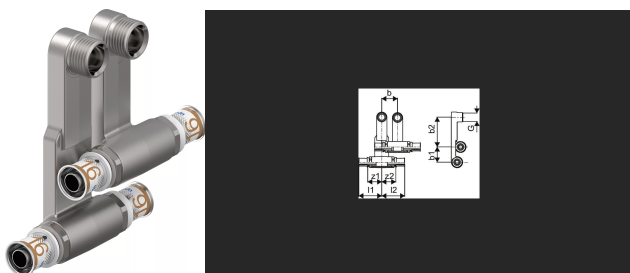

### Technical data

Item (unit of measurement)	pce
Length (l1)	51 mm
Length (l2)	51 mm
Z-measurement b	35 mm
Z-measurement b1	34 mm
Z-measurement b2	66 mm
z2	31 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	192

### Technical documents

[Download documents here](#)

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)