


## Uponor S-Press PLUS adapter 16-12CU

1070706

- Adapter with plated copper spigot
- The connection of the plated copper pipe can be made using standard BS EN 1254 compression type fitting, or a compatible metal press connection.

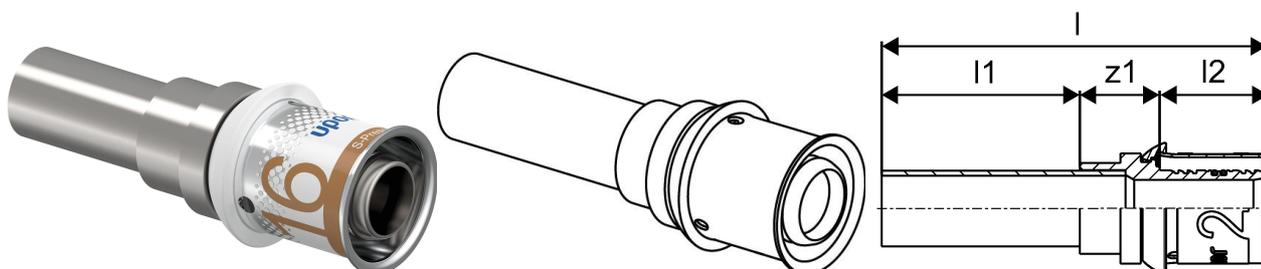

### About Uponor S-Press PLUS adapter

#### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS adapter 16-12CU

1070706

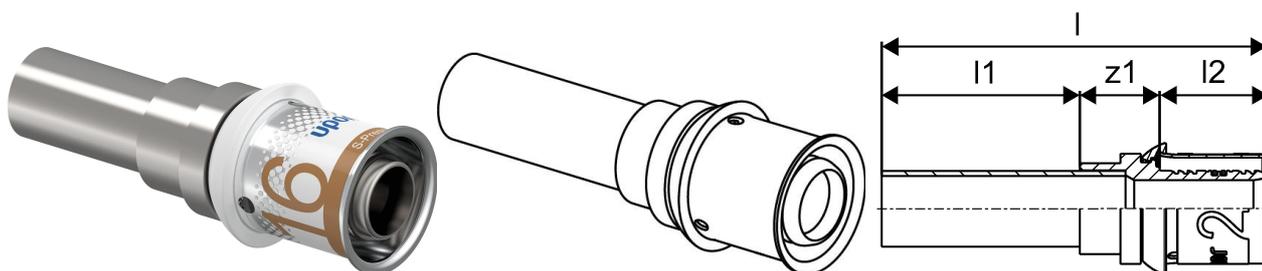

### Product code

Item no EAN	6414905221585
Item no GF	35001070706
Item no GTIN	06414905221585
Item no LVI	1720800
Item no NOBB	55172906
Item no NRF	5114563
Item no RSK	1899438
Item no VVS	045485017

### Dimensions

Item Unit Height	21.9
Item Unit Length	65.5
Item Unit Weight	0,035
Item Unit Width	21.9
Item_UOM	pce

### Measurements

LENGTH_L	65,5
Length (l1)	30
Length (l2)	19,8
z1	15,7

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	------------------------------------------------------

### Packaging

Packaging GTIN PL1	06414905635054
Packaging GTIN PL3	06414905477340
Packaging GTIN PL4	06414905477357
Packaging Height PL1	89
Packaging Height PL3	95

Packaging Height PL4	714
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	20
Packaging Quantity PL3	80
Packaging Quantity PL4	7680
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,68544
Packaging Weight PL1	0,738
Packaging Weight PL3	3,152
Packaging Weight PL4	327,592
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
 WD18 8GA, Watford  
 UK

T +44 (0)1923 927000  
 E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)