


## Uponor Smatrix Base slave module M-140 Bus 6x

**1071686**

- 6 channel slave module for Uponor Smatrix Base controller X-145 Bus 6X and Uponor Smatrix Base PRO controller X-147 Bus 6X and Uponor Smatrix Base pro controller X-148 Modbus RTU
- supports up to 6 room thermostats and 6 actuators
- click-in installation
- protection class: IP20
- color: grey

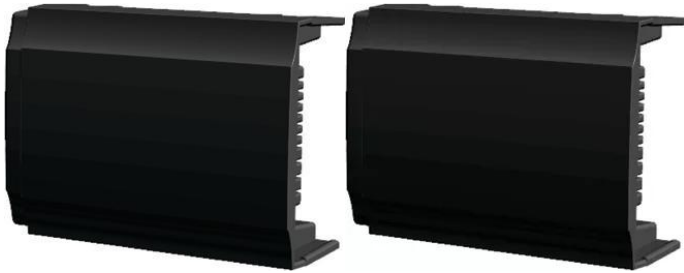

### About Uponor Smatrix Base slave module M-140 Bus

#### Specification

- up to 4 controller in one system
- operating voltage: 230V
- autobalancing optimises energy use and comfort
- electric control
- supports up to 6 room thermostats and 8 actuators (24V) per controller
- pump and boiler relays
- valve and pump exercise
- relative humidity control
- different wiring options (daisy chain / star)
- 4-wire Bus installation
- communication protocol: RS485 serial bus
- max. power input per actuator: 24VAC / 0.2A (0.4A peak)

#### Smatrix Base Pulse:

- local access (Wi-Fi) or remote access (internet connection required) via Uponor Smatrix Pulse App (with R-208)
- temporary wi-fi access point for direct access (if local wi-fi is not available) (with R-208)
- smart home ecosystem integration (Amazon Alexa, Google Home) (with R-208)
- multi-home control (with R-208)
- third-party access for remote support (user allowance required) (with R-208)
- history trend analysis via Uponor Smatrix Pulse app (with R-208)
- timer programming (with R-208)
- comfort settings (with R-208)
- supply diagnostics (with R-208)

#### Application


- wired room temperature control for radiant heating and cooling
- set point range: +5°C ... +35°C

#### Certification

- CE / EAC

## Uponor Smatrix Base slave module M-140 Bus 6x

1071686

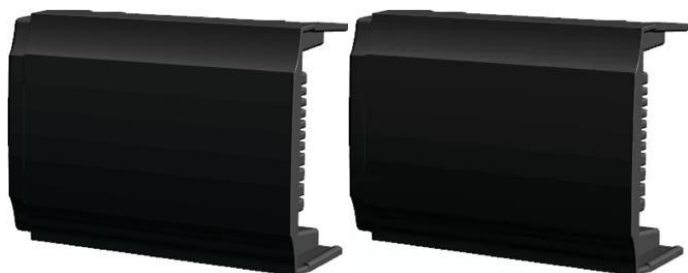

### Technical documents

Download documents here 

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)