


## Uponor Ecoflex jointing equal PN6 125x11,4-125x11,4

**1078365**

- Connection of PE-Xa or PE pipe
- 6 bar, SDR 11
- DR = dezincification resistance brass

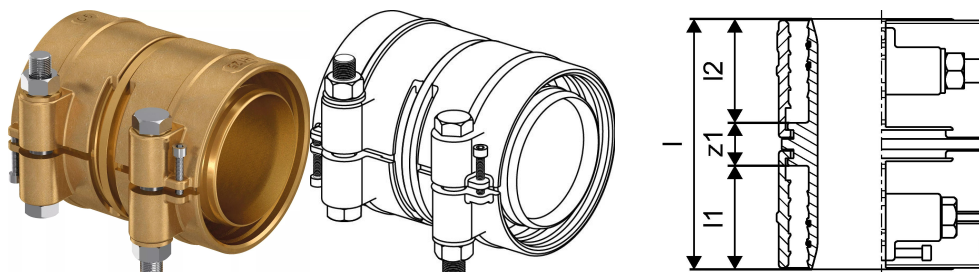

### About Uponor Ecoflex jointing equal PN6

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex jointing equal PN6 125x11,4-125x11,4

1078365

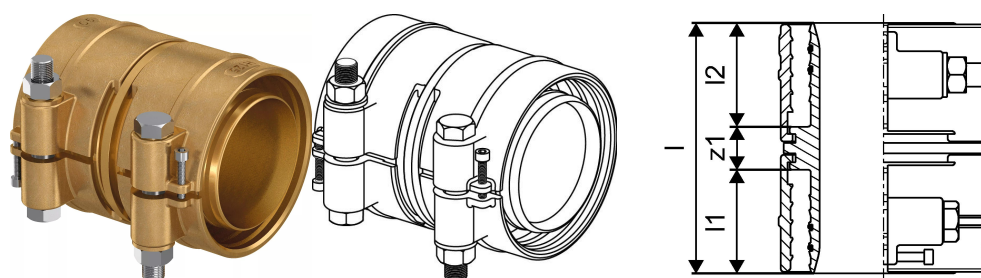

### Technical data

Item no EAN	4021598130241
Item no GTIN	04021598130241
Item no VVS	087882325
RSK no.	2282485
Item no NRF	8361337
Item no LVI	1938510
Item (unit of measurement)	pce
Length (l)	169 mm
Length (l1)	70 mm
Length (l2)	70 mm
Packaging Quantity 1	1
Packaging GTIN PL1	06414900328265
Item Unit Height	170 mm
Item Unit Weight	7,66 kg
Item Unit Width	158 mm

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)