


Uponor Ecoflex jointing equal PN6 125x11,4-125x11,4

1078365

- Connection of PE-Xa or PE pipe
- 6bar, SDR 11
- DZR - dezincification resistant brass

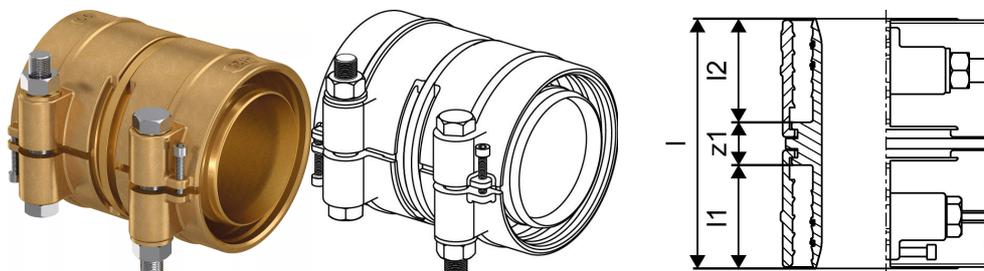

About Uponor Ecoflex jointing equal PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification to BS EN ISO 6509 with stainless steel screw.
- Sizes 25-110mm, O-ring sealing between Wipex coupling and base fitting
- Sizes 125-160mm, threads must be sealed using a suitable sealing medium
- Bolt set for couplers in stainless steel with brass washer
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Thermo HP
- Connection of PE and PE-Xa carrier pipes to couplers
- Parallel G male thread
- Max. operating temperature 95°C

Certification

- UK Reg4 approval
 - WRAS or
 - KIWA
- To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex jointing equal PN6 125x11,4-125x11,4

1078365

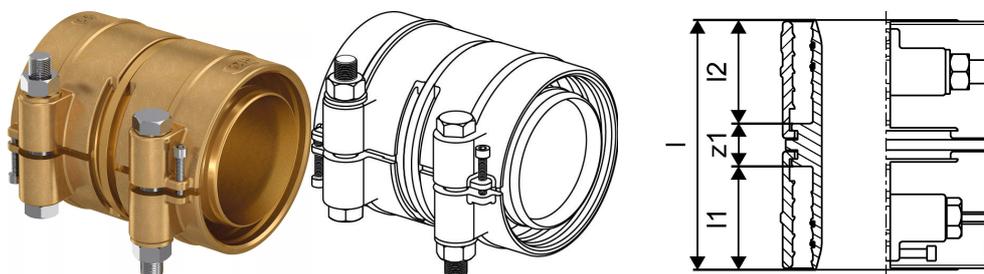

Product code

Item no EAN	4021598130241
Item no GF	35001078365
Item no GTIN	04021598130241
Item no LVI	1938510
Item no NOBB	49606926
Item no NRF	8361337
Item no RSK	2282485
Item no VVS	087882325

Dimensions

Item Unit Height	170
Item Unit Length	139
Item Unit Weight	7,66
Item Unit Width	158
Item_UOM	pce

Measurements

LENGTH_L	169
Length (l1)	70
Length (l2)	70
Wall thickness_s	11,4
z1	29

Status

MTO (longer delivery times)

Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414900328265
Packaging Height PL1	155
Packaging Length PL1	295
Packaging Quantity PL1	1

Packaging Type PL1	Base_Box
Packaging Volume PL1	0,009145
Packaging Weight PL1	7,77
Packaging Width PL1	200

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb