


Uponor Ecoflex tee Rp4-Rp4-Rp4

1078367

- Parallel thread Rp - requires a suitable sealing medium
- 6 bar, SDR 11 / 10 bar, SDR 7,4
- DZR - dezincification resistant brass

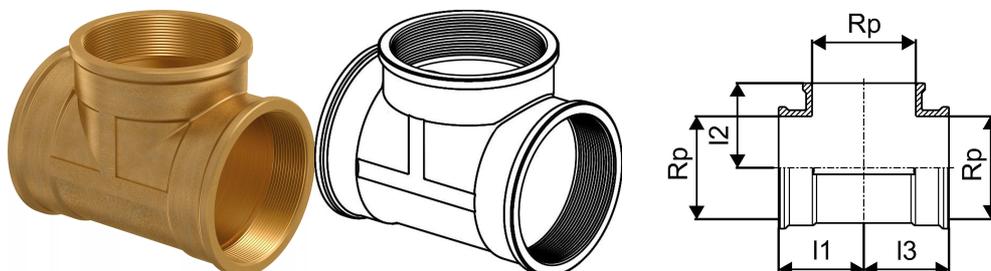

About Uponor Ecoflex tee

Specification

- Wipex fittings in corrosion-resistant brass, dezincification to BS EN ISO 6509 with stainless steel screw.
- Sizes 25-110mm, O-ring sealing between Wipex coupling and base fitting
- Sizes 125-160mm, threads must be sealed using a suitable sealing medium
- Bolt set for couplers in stainless steel with brass washer
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Thermo HP
- Connection of PE and PE-Xa carrier pipes to couplers
- Parallel G male thread
- Max. operating temperature 95°C

Certification

- UK Reg4 approval
 - WRAS or
 - KIWA
- To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex tee Rp4-Rp4-Rp4

1078367

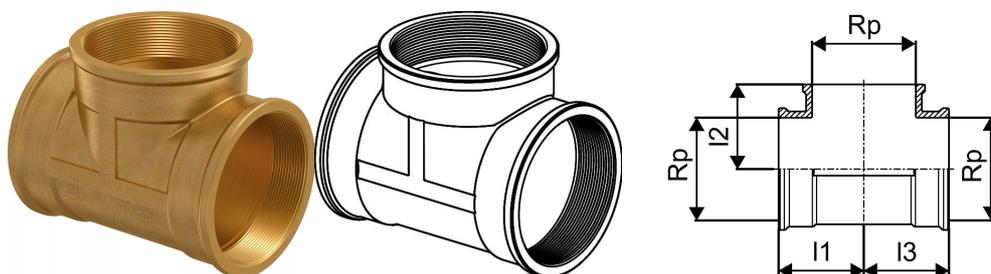

Measurements

Female thread Rp	4
Length (I1)	91
Length (I2)	91
Length (I3)	91

Product code

Item no EAN	4021598130265
Item no GF	35001078367
Item no GTIN	04021598130265
Item no LVI	1938512
Item no NOBB	49606945
Item no NRF	8361339
Item no RSK	2282487
Item no VVS	045288100

Dimensions

Item Unit Height	183
Item Unit Length	160
Item Unit Weight	3,44
Item Unit Width	129
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

Packaging

Packaging GTIN PL1	06414900328272
Packaging Height PL1	155
Packaging Length PL1	255
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box

Packaging Volume PL1	0,007905
Packaging Weight PL1	3,55
Packaging Width PL1	200

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb