


Uponor Ecoflex coupling PN6 125x11,4-R4

1078368

- Connection of PE-Xa or PE pipe
- 6 bar, SDR 11
- R type tapered thread, requires suitable sealing medium to be applied
- Cannot be used with Wipex fittings!
- DZR - dezincification resistant brass

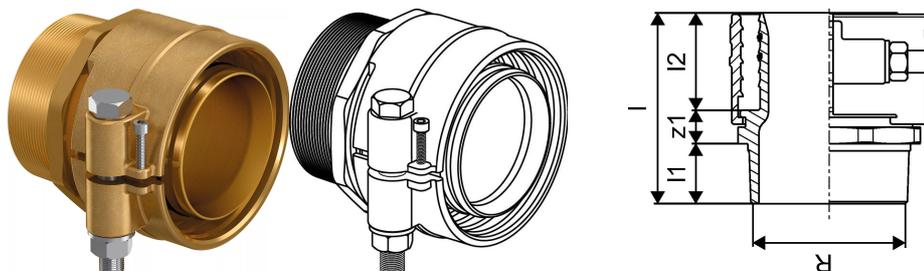

About Uponor Ecoflex coupling PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification to BS EN ISO 6509 with stainless steel screw.
- Sizes 25-110mm, O-ring sealing between Wipex coupling and base fitting
- Sizes 125-160mm, threads must be sealed using a suitable sealing medium
- Bolt set for couplers in stainless steel with brass washer
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application

- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Thermo HP
- Connection of PE and PE-Xa carrier pipes to couplers
- Parallel G male thread
- Max. operating temperature 95°C

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex coupling PN6 125x11,4-R4

1078368

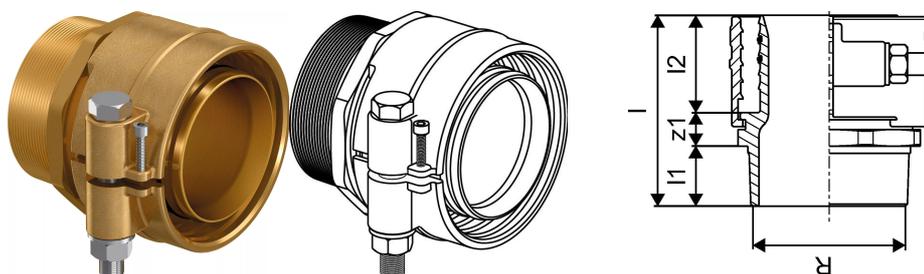

Product code

Item no EAN	4021598130272
Item no GF	35001078368
Item no GTIN	04021598130272
Item no LVI	1938513
Item no NOBB	49606953
Item no NRF	8361341
Item no RSK	2282488
Item no VVS	087883425

Dimensions

Item Unit Height	140
Item Unit Length	140
Item Unit Weight	4,99
Item Unit Width	160
Item_UOM	pce

Measurements

LENGTH_L	137
Length (l1)	43
Length (l2)	70
Male_thread_R	4
Wall thickness_s	11,4
z1	24

Packaging

Packaging GTIN PL1	06414900396783
Packaging Height PL1	155
Packaging Length PL1	270
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box

Packaging Volume PL1	0,00837
Packaging Weight PL1	5,10
Packaging Width PL1	200

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb