


## Uponor Ecoflex flange F100/8-180/Rp4

1078370

- Parallel thread Rp" - requires suitable sealing medium
- 6 bar, SDR 11 / 10 bar, SDR 7,4
- Stainless steel

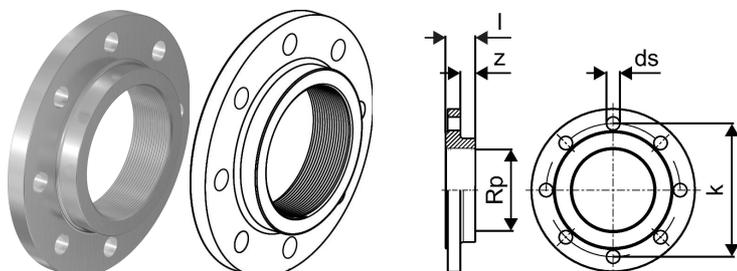

### About Uponor Ecoflex flange

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification to BS EN ISO 6509 with stainless steel screw.
- Sizes 25-110mm, O-ring sealing between Wipex coupling and base fitting
- Sizes 125-160mm, threads must be sealed using a suitable sealing medium
- Bolt set for couplers in stainless steel with brass washer
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application

- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Thermo HP
- Connection of PE and PE-Xa carrier pipes to couplers
- Parallel G male thread
- Max. operating temperature 95°C

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor Ecoflex flange F100/8-180/Rp4

1078370

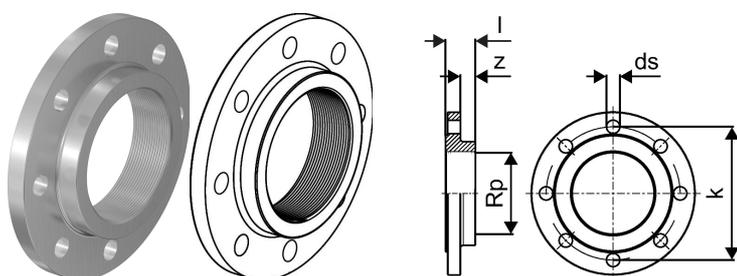

### Measurements

Female thread Rp	4
LENGTH_L	40
Z Measurement k	180
Z	20

### Product code

Item no EAN	4021598130296
Item no GF	35001078370
Item no GTIN	04021598130296
Item no LVI	1938515
Item no NOBB	49606972
Item no NRF	8361343
Item no RSK	2282490
Item no VVS	087844092

### Dimensions

Item Unit Height	40
Item Unit Length	220
Item Unit Weight	4,62
Item Unit Width	220
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905469543
Packaging Height PL1	40
Packaging Length PL1	220
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,001936
Packaging Weight PL1	4,70

Packaging Width PL1

220

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)