


## Uponor COMBI PIPE PIPE WHITE PN6 S 32x2,9 5M

1083815

- Operating pressure 6 bar
- 5m bars
- White

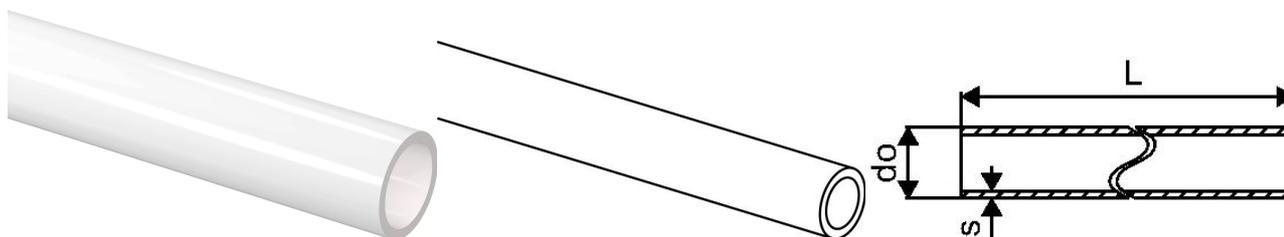

### About Uponor COMBI PIPE PIPE WHITE PN6 S

#### Specification


- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Underfloor heating and low temperature radiators
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 6 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor COMBI PIPE PIPE WHITE PN6 S 32x2,9 5M

1083815

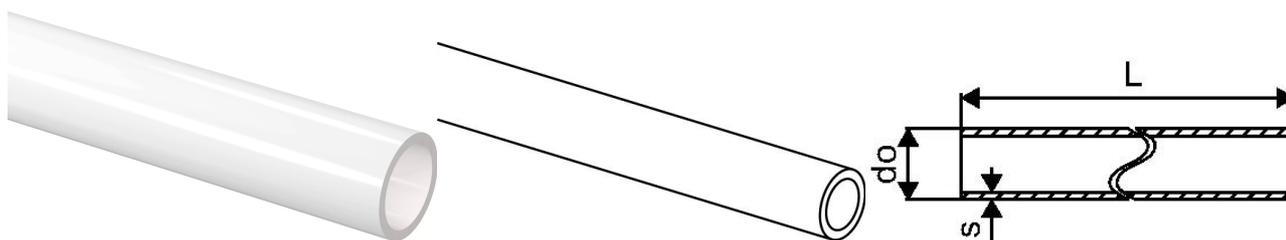

### Product code

Item no EAN	6414905514458
Item no GTIN	06414905514458

### Dimensions

Item Unit Height	32
Item Unit Length	1000
Item Unit Weight	0,448
Item Unit Width	32
Item_UOM	m

### Measurements

Outer Diameter_do	32
Wall thickness_s	2,9

### Packaging

Packaging GTIN PL2	06414905422227
Packaging GTIN PL4	06414905422234
Packaging Height PL2	115
Packaging Height PL4	750
Packaging Length PL2	5460
Packaging Length PL4	5100
Packaging Quantity PL2	35
Packaging Quantity PL4	1785
Packaging Type PL2	Cover_Pipe
Packaging Type PL4	Wooden_Cage
Packaging Volume PL2	0,0722085
Packaging Volume PL4	4,2075
Packaging Weight PL2	17,68
Packaging Weight PL4	832,677
Packaging Width PL2	115
Packaging Width PL4	1100

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)