
Product data sheet



GF Uponor Multi insulation panel XPS 400 10X600X1250mm

1084161

- Thermal insulation made of XPS 400
- With tongue and groove at sides for easy mounting
- Thermal conductivity: λ = 0.035 W/mK
- Fire class E to BS EN 13501-1

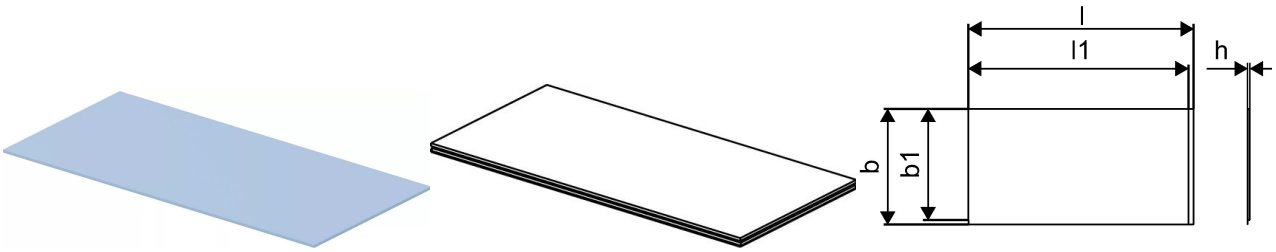

About GF Uponor Multi insulation panel XPS 400

Specification


- UFH installation accessories and components for multiple systems

Application

- Radiant heating and cooling systems

GF Uponor Multi insulation panel XPS 400 10X600X1250mm

1084161

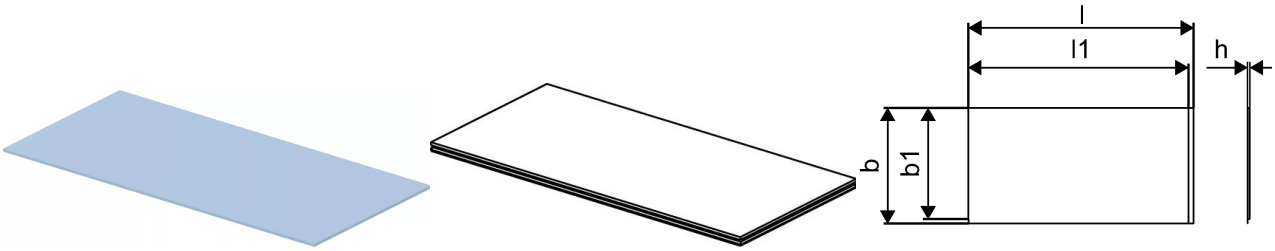

Product code

Item no EAN	4021598147447
Item no GTIN	04021598147447

Dimensions

Item Unit Height	10
Item Unit Length	600
Item Unit Weight	0,3
Item Unit Width	1250
Item_UOM	m²

Packaging

Packaging GTIN PL1	06414905470082
Packaging GTIN PL4	06414905500772
Packaging Height PL1	400
Packaging Height PL4	2400
Packaging Length PL1	1250
Packaging Length PL4	1250
Packaging Quantity PL1	30
Packaging Quantity PL4	360
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,3
Packaging Volume PL4	3,6
Packaging Weight PL1	9,1
Packaging Weight PL4	110
Packaging Width PL1	600
Packaging Width PL4	1200

Measurements

Z Measurement b	600
Z Measurement h	10

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+