



Uponor Ecoflex chamber 2x250-6x140/175/200

1084576

- Chamber for connecting the casing pipe
- PE body with insulation and reducer spigots
- T and X models available
- Traffic load of 500 kg, higher load with special concret construction possible

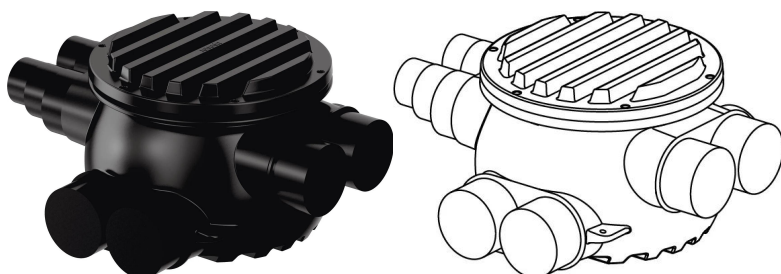

About Uponor Ecoflex chamber

Specification

- All accessories are corrosion resistant.

Application



- Ecoflex accessories are designed to complete the assortment in buried installation.

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex chamber 2x250-6x140/175/200

1084576

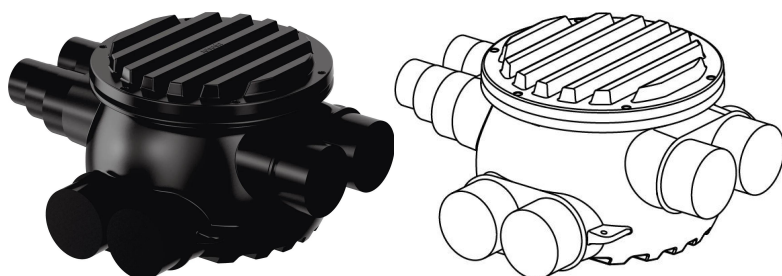

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb