Product data sheet





GF Uponor Ecoflex chamber 2x250-6x140/175/200

1084576

- Chamber for connecting the casing pipe
- PE body with insulation and reducer spigots
- T and X models available
- Traffic load of 500 kg, higher load possible with special concrete construction



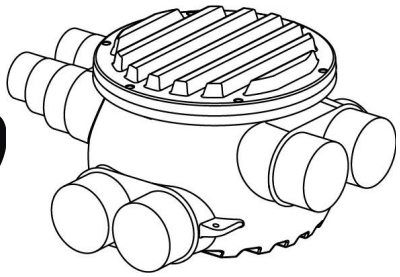



About GF Uponor Ecoflex chamber

Specification

- All accessories are corrosion resistant.

Application

- Ecoflex accessories are designed for all below ground buried installations


Certification


-

GF Uponor Ecoflex chamber 2x250-6x140/175/200

1084576



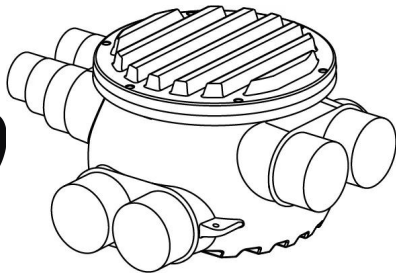



Measurements

Inner_diameter_di	760
LENGTH_L	1652
Length (l1)	1486
Outer Diameter_do	940
Z Measurement b	300
Z Measurement h	725
Z Measurement h1	420
Z Measurement h2	165

Status

Item Available Till date	2026-12-31T00:00:00.000+0100

Product code

Item no EAN	4021598132399
Item no GF	35001084576
Item no GTIN	04021598132399
Item no LVI	3010429
Item no NOBB	49605598
Item no NRF	8361321
Item no RSK	2282470
Item no VVS	087918010

Dimensions

Item Unit Height	725
Item Unit Length	1451
Item Unit Weight	53
Item Unit Width	1632
Item_UOM	pce

Packaging

Packaging GTIN PL4	06414905500932
Packaging Height PL4	740
Packaging Length PL4	1451
Packaging Quantity PL4	1
Packaging Type PL4	Pallet
Packaging Volume PL4	1,75234368
Packaging Weight PL4	68
Packaging Width PL4	1632

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+