


Uponor Ecoflex chamber 6x250-2x140/175/200

1084578

- Chamber for connecting the casing pipe
- PE body with insulation and reducer spigots
- T and X models available
- Traffic load of 500 kg, higher load possible with special concrete construction

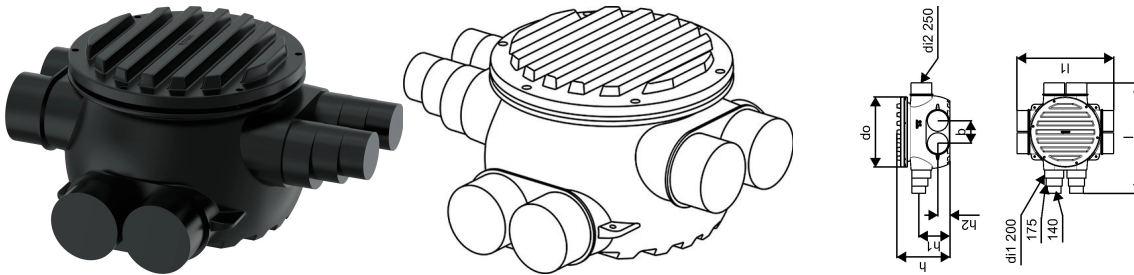

About Uponor Ecoflex chamber

Specification

- All accessories are corrosion resistant.

Application


- Ecoflex accessories are designed for all below ground buried installations

Certification

-

Uponor Ecoflex chamber 6x250-2x140/175/200

1084578

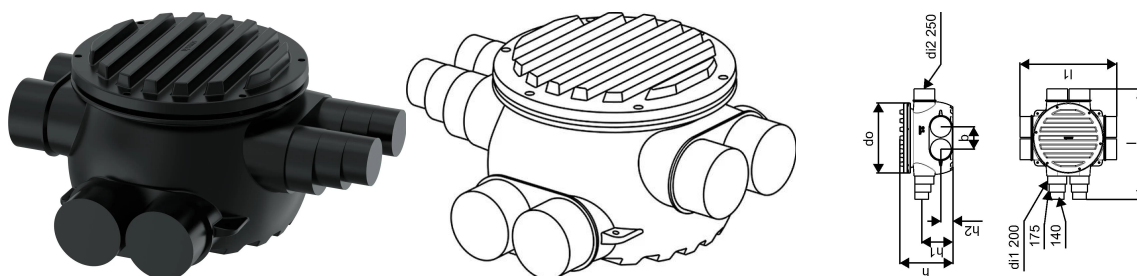

Measurements

Inner_diameter_di	760
LENGTH_L	1486
Length (l1)	1304
Outer Diameter_do	940
Z Measurement b	300
Z Measurement h	725
Z Measurement h1	420
Z Measurement h2	165

Status

Item Available Till date 2026-12-31T00:00:00.000+0100

Product code

Item no EAN	4021598132412
Item no GF	35001084578
Item no GTIN	04021598132412
Item no LVI	3010431
Item no NOBB	49605617
Item no NRF	8361323
Item no RSK	2282472
Item no VVS	087918012

Dimensions

Item Unit Height	725
Item Unit Length	1250
Item Unit Weight	53
Item Unit Width	1441
Item_UOM	pce

Packaging

Packaging GTIN PL4 06414905500956

Packaging Height PL4	740
Packaging Length PL4	1250
Packaging Quantity PL4	1
Packaging Type PL4	Pallet
Packaging Volume PL4	1,332925
Packaging Weight PL4	68
Packaging Width PL4	1441

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E
customerservice.uk.bfs@georgfi
scher.com