Product data sheet



GF Uponor Radi Pipe white PN6 12x1,1 100m

1085245

- Operating pressure 6 bar
- Coils
- White

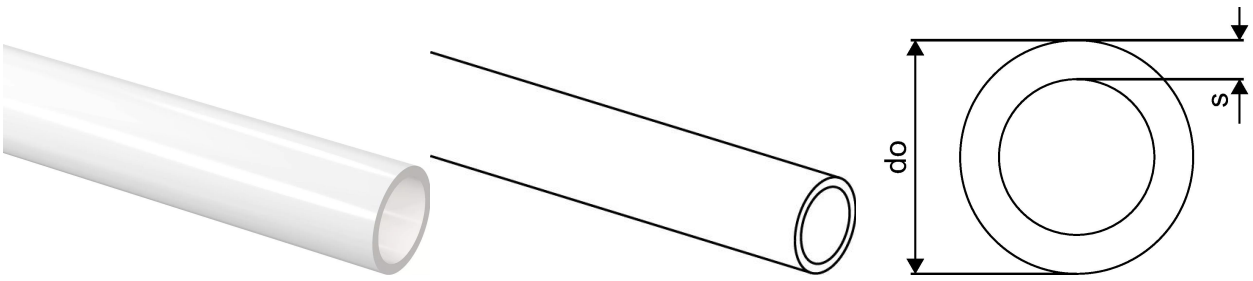

About GF Uponor Radi Pipe white PN6

Specification

- Pipes manufactured from cross-linked polyethylene - PE-Xa acc. BS EN ISO 15875 with EVOH oxygen barrier
- Application class 5 - high temperature radiators
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Heating: The permanent operating temperature ranges up to 80°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

GF Uponor Radi Pipe white PN6 12x1,1 100m

1085245

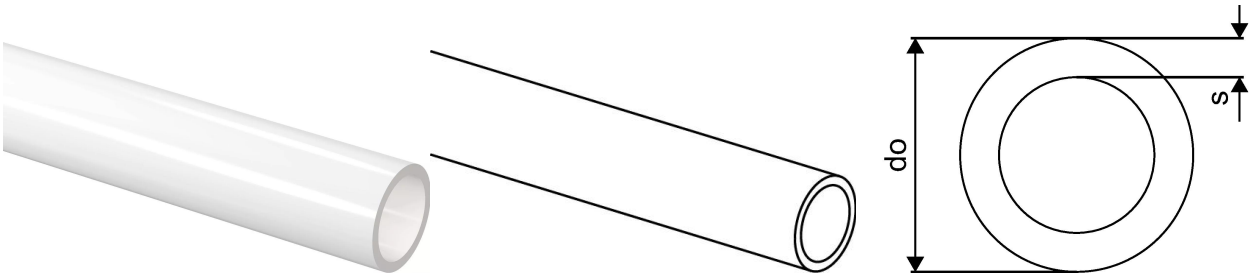

Product code

Item no EAN	6414905514526
Item no GTIN	06414905514526

Dimensions

Item Unit Height	12
Item Unit Length	1000
Item Unit Weight	0,03
Item Unit Width	12
Item_UOM	m

Measurements

Outer Diameter_do	12
Wall thickness_s	1,1

Packaging

Packaging GTIN PL1	06414905283729
Packaging GTIN PL4	06414905283736
Packaging Height PL1	804
Packaging Height PL4	948
Packaging Length PL1	788
Packaging Length PL4	1200
Packaging Quantity PL1	100
Packaging Quantity PL4	1500
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0475164
Packaging Volume PL4	0,91008
Packaging Weight PL1	3,2

Packaging Weight PL4	70
Packaging Width PL1	75
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+