


Uponor Vario S manifold FM 7x3/4 Euro

1086543

- Supply with flow meter for balancing and shutoff
- Return with valves and caps

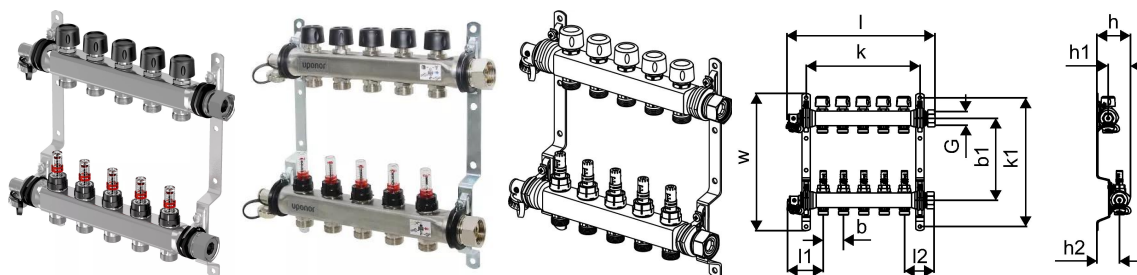

About Uponor Vario S manifold FM

Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold FM 7x3/4 Euro

1086543

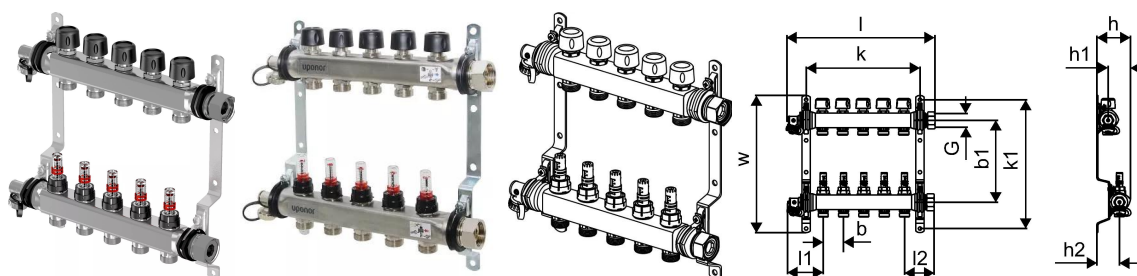

Technical documents

Download documents here [↓](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb