


Uponor Vario S manifold FM 11x3/4 Euro

1086547

- Supply with flow meter for balancing and shutoff
- Return with valves and caps

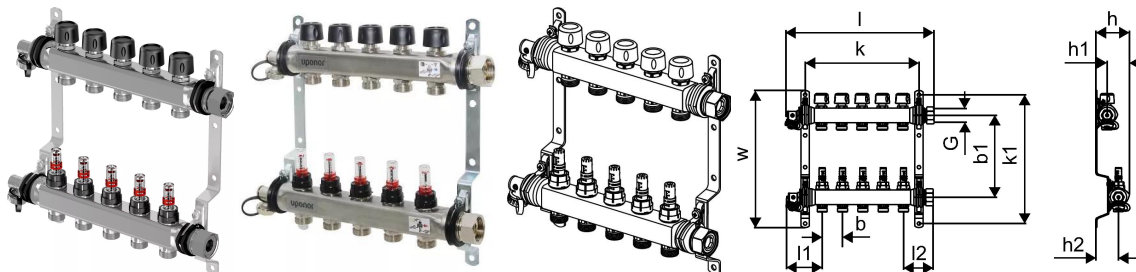

About Uponor Vario S manifold FM

Specification

- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold FM 11x3/4 Euro

1086547



Technical data

Item no EAN	4021598135284
Item no GTIN	04021598135284
Item no LVI	2022133
Item (unit of measurement)	pce
Length (l)	660 mm
Length (l1)	87 mm
Length (l2)	73 mm
Z-measurement b	50 mm
Z-measurement b1	215 mm
Z-measurement h	75 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	585 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	48
Packaging GTIN PL1	06414905471966
Packaging GTIN PL4	06414905503285
Item Unit Height	85 mm
Item Unit Weight	6,4 kg
Item Unit Width	235 mm

Technical documents

Download documents here

[E enquiries.uk@uponor.com](mailto:E_enquiries.uk@uponor.com)

www.uponor.com/en-gb