


Uponor Vario ball valve, elbow Rp 3/4" - G1"

1086559

- Made of brass, nickel-plated

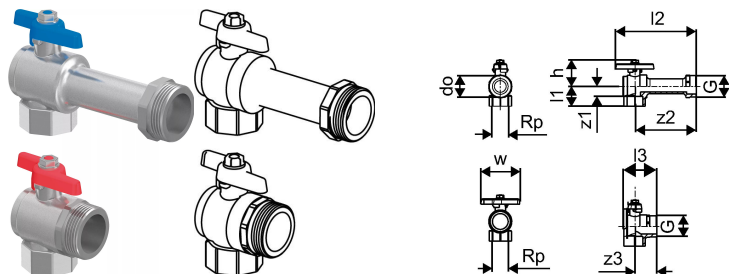

About Uponor Vario ball valve, elbow

Specification


- Components made of brass, nickel-plated brass, steel, and engineered plastics
- Eurocone, threaded, and flat-sealing connections
- Compatible with Vario B, C, S, M, PLUS, and MAGNA manifolds
- Includes valves, flowmeters, air vents, actuators, and adapters
- Designed for heating and cooling applications

Application

- To compliment/extend Vario manifold installations
- Flow regulation, balancing, and shut-off
- Connection of PEX, MLCP, and composite pipes
- Integration of actuators, sensors, and control units
- Commissioning, maintenance, and system optimization

Uponor Vario ball valve, elbow Rp 3/4" - G1"

1086559

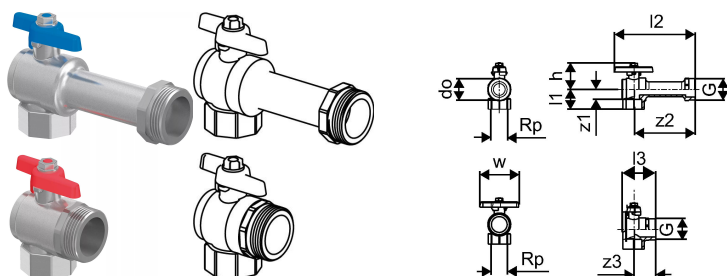

Measurements

Cylindric_thread_G	1
Female thread Rp	3/4
Length (l1)	31
Length (l2)	123
Length (l3)	51,5
Outer Diameter_do	33
Z Measurement h	42,5
Z Measurement w	60
z1	22
Z2	93
Z3	32,5

Product code

Item no EAN	4021598135406
Item no GF	35001086559
Item no GTIN	04021598135406
Item no LVI	2024554
Item no VVS	046231320

Dimensions

Item Unit Height	130
Item Unit Length	95
Item Unit Weight	0,78
Item Unit Width	70
Item_UOM	set

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

Packaging

Packaging GTIN PL1	06414905232598
--------------------	----------------

Packaging Height PL1	130
Packaging Length PL1	115
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,0010465
Packaging Weight PL1	0,788
Packaging Width PL1	70

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb