


## Uponor Smart UFH-pipe 16x2,0 240m

**1086575**

- UFH pipe made of PE-RT
- Complying with ISO 22391 and fulfils the requirement for oxygen diffusion resistance as per DIN 4726
- Compatible to Uponor Smart compression fittings
- Application class 4
- Design pressure 6 Bar at 70°C

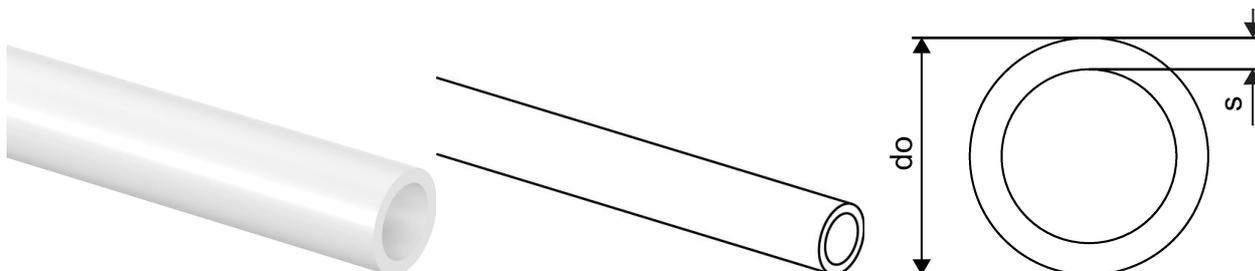

### About Uponor Smart UFH-pipe

#### Specification


- Smart underfloor heating system portfolio
- with Tacker panels and pipe fixations

#### Application

- Underfloor heating systems
- Residential and light commercial heating installations
- Screeded floor constructions with thermal and impact sound insulation

## Uponor Smart UFH-pipe 16x2,0 240m

1086575

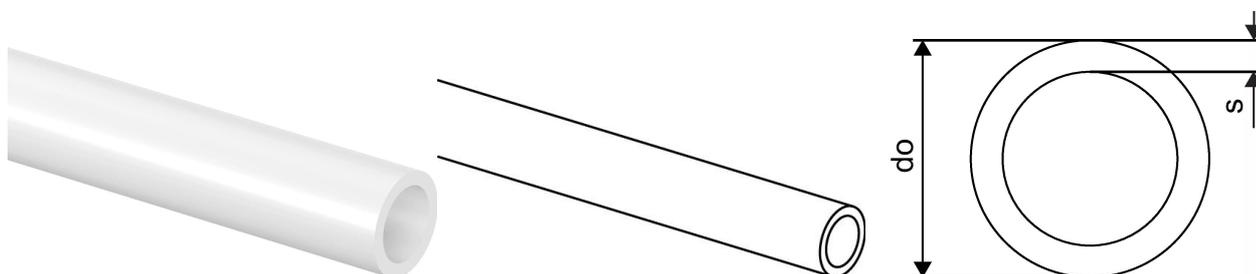

### Product code

Item no EAN	7321500058074
Item no GF	35001086575
Item no GTIN	07321500058074
Item no LVI	2022055
Item no RSK	2716763
Item no VVS	087414216

### Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,092
Item Unit Width	16
Item_UOM	m

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Measurements

Outer Diameter_do	16
Wall thickness_s	2

### Packaging

Packaging GTIN PL3	06414905284078
Packaging GTIN PL4	06414905284085
Packaging Height PL3	800
Packaging Height PL4	940
Packaging Length PL3	800
Packaging Length PL4	1200
Packaging Quantity PL3	240
Packaging Quantity PL4	1440
Packaging Type PL3	Box

Packaging Type PL4	Pallet
Packaging Volume PL3	0,128
Packaging Volume PL4	0,9024
Packaging Weight PL3	22,08
Packaging Weight PL4	157,48
Packaging Width PL3	200
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)