


Uponor Smart UFH-pipe 16x2,0 640m

1086576

- UFH pipe made of PE-RT
- complying with ISO 22391 and fulfils the requirement for oxygen diffusion resistance as per DIN 4726
- compatible to Uponor Smart compression fittings
- application class 4
- design pressure 6 Bar at 70°C

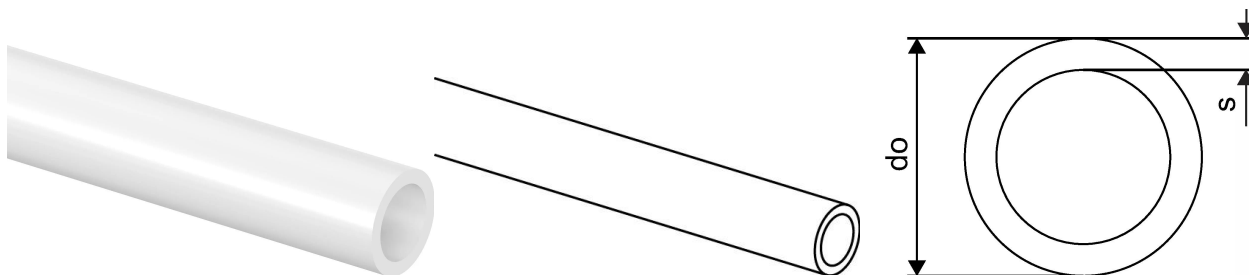


About Uponor Smart UFH-pipe

Specification

- Smart underfloor heating system portfolio
- with Tacker panels and pipe fixations

Uponor Smart UFH-pipe 16x2,0 640m

1086576

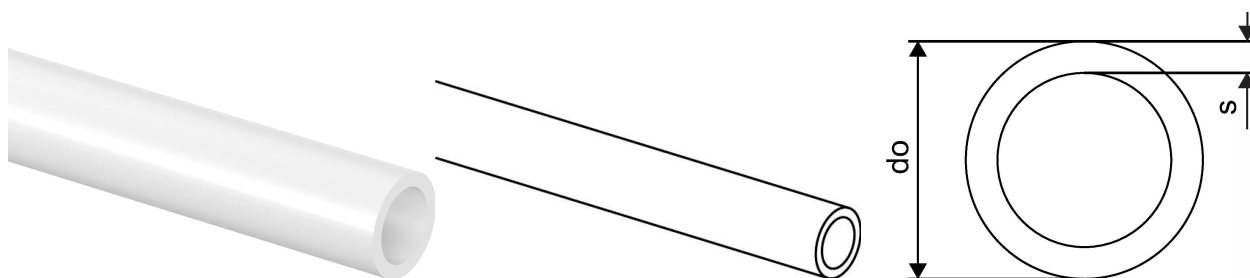

Technical data

Item no EAN	7321500058081
Item no GTIN	07321500058081
Item no VVS	087414616
RSK no.	2716764
Item no LVI	2022056
Item (unit of measurement)	m
Packaging Quantity 3	640
Packaging Quantity 4	1280
Packaging GTIN PL3	06414905284092
Packaging GTIN PL4	06414905284108
Item Unit Height	16 mm
Item Unit Weight	0,092 kg
Item Unit Width	16 mm

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb