


Uponor Smart UFH-pipe 16x2,0 640m

1086576

- UFH pipe made of PE-RT
- Complying with ISO 22391 and fulfils the requirement for oxygen diffusion resistance as per DIN 4726
- Compatible to Uponor Smart compression fittings
- Application class 4
- Design pressure 6 Bar at 70°C

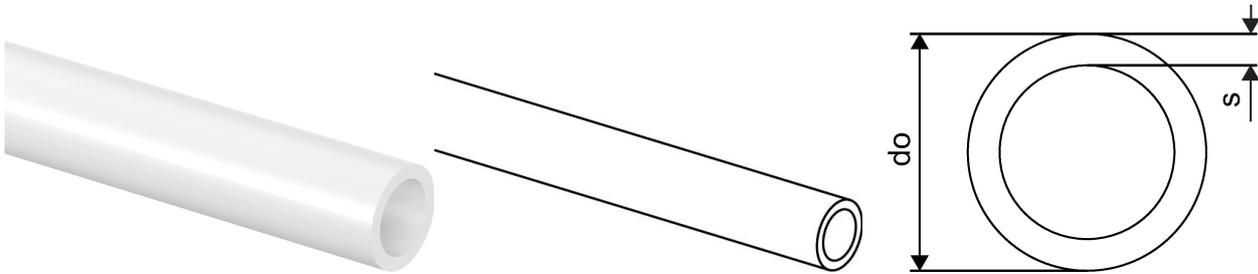

About Uponor Smart UFH-pipe

Specification


- Smart underfloor heating system portfolio
- with Tacker panels and pipe fixations

Application

- Underfloor heating systems
- Residential and light commercial heating installations
- Screeded floor constructions with thermal and impact sound insulation

Uponor Smart UFH-pipe 16x2,0 640m

1086576

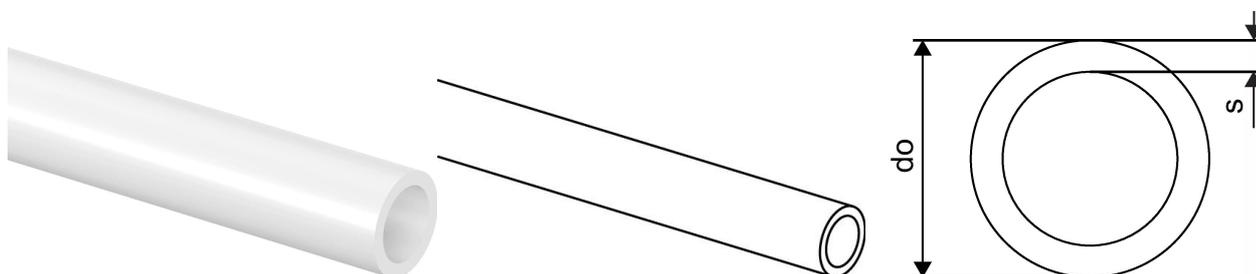

Product code

Item no EAN	7321500058081
Item no GF	35001086576
Item no GTIN	07321500058081
Item no LVI	2022056
Item no RSK	2716764
Item no VVS	087414616

Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,092
Item Unit Width	16
Item_UOM	m

Measurements

Outer Diameter_do	16
Wall thickness_s	2

Packaging

Packaging GTIN PL3	06414905284092
Packaging GTIN PL4	06414905284108
Packaging Height PL3	580
Packaging Height PL4	940
Packaging Length PL3	710
Packaging Length PL4	1200
Packaging Quantity PL3	640
Packaging Quantity PL4	1280
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL3	0,292378

Packaging Volume PL4	0,9024
Packaging Weight PL3	59,88
Packaging Weight PL4	144,76
Packaging Width PL3	710
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb