


## Uponor Smart UFH-pipe 20x2,0 480m

**1086578**

- UFH pipe made of PE-RT
- Complying with ISO 22391 and fulfils the requirement for oxygen diffusion resistance as per DIN 4726
- Compatible to Uponor Smart compression fittings
- Application class 4
- Design pressure 6 Bar at 70°C

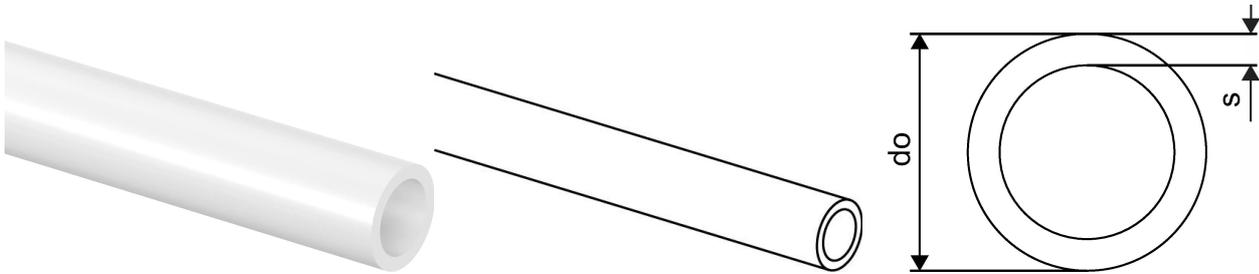

### About Uponor Smart UFH-pipe

#### Specification


- Smart underfloor heating system portfolio
- with Tacker panels and pipe fixations

#### Application

- Underfloor heating systems
- Residential and light commercial heating installations
- Screeded floor constructions with thermal and impact sound insulation

## Uponor Smart UFH-pipe 20x2,0 480m

1086578

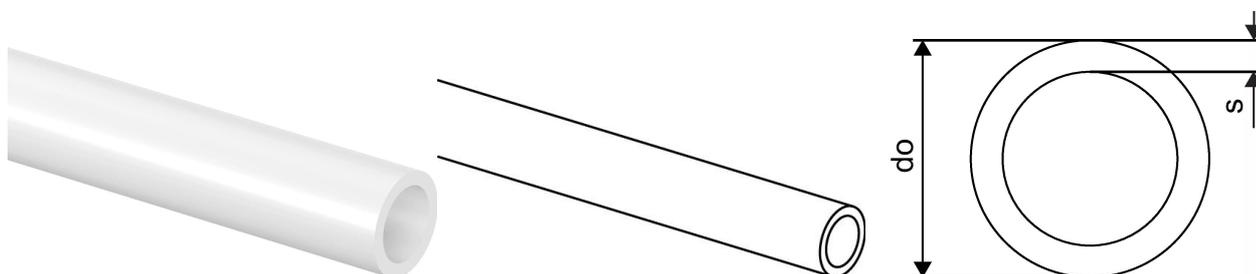

### Product code

Item no EAN	7321500058906
Item no GF	35001086578
Item no GTIN	07321500058906
Item no LVI	2022058
Item no RSK	2716766
Item no VVS	087414620

### Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,118
Item Unit Width	20
Item_UOM	m

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Measurements

Outer Diameter_do	20
Wall thickness_s	2

### Packaging

Packaging GTIN PL3	06414905284146
Packaging GTIN PL4	06414905284153
Packaging Height PL3	580
Packaging Height PL4	940
Packaging Length PL3	750
Packaging Length PL4	1200
Packaging Quantity PL3	480
Packaging Quantity PL4	960
Packaging Type PL3	Box

Packaging Type PL4	Pallet
Packaging Volume PL3	0,32625
Packaging Volume PL4	0,9024
Packaging Weight PL3	54,76
Packaging Weight PL4	134,52
Packaging Width PL3	750
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)