
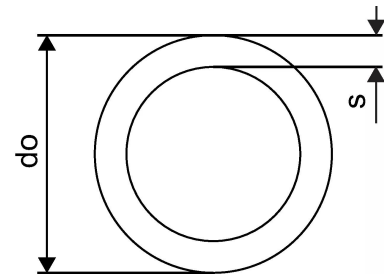


Uponor Klett Comfort Pipe PLUS 16x2,0 240m

1087302

- UFH pipe made of PEX-a, with Klett hook tape
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

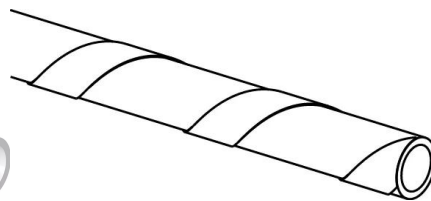

About Uponor Klett Comfort Pipe PLUS

Specification

- Klett underfloor heating panel system, consists of Klett-foil for hook- and loop fixation laminated onto EPS according to EN 13163 and DIN 4108-10.
- based on hook- and loop fixation of Klett-pipes to insulation panels
- EN 13501-1 fire classification: class E
- standard flammability, building-material class B2, conforming to DIN 4102
- with self-adhesive tape at long side
- foil on the panel is printed with 100x100mm grid pattern

Application



- radiant underfloor heating and cooling
- for use with cement- and anhydrite-based screeds

Certification

- DIN CERTCO: 3V372 PE-Xa; 7F235-F; 7F236-F; 7F342-F

Uponor Klett Comfort Pipe PLUS 16x2,0 240m

1087302

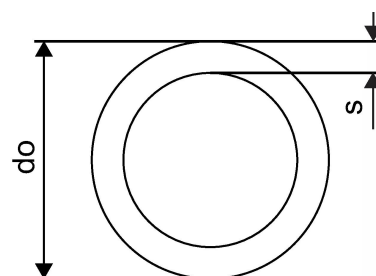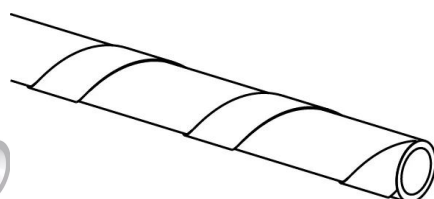

Technical data

Item no EAN	6414905238248
Item no GTIN	06414905238248
RSK no.	2717492
Item no NRF	8361312
Item (unit of measurement)	m
Packaging Quantity 3	240
Packaging Quantity 4	1200
Packaging GTIN PL3	06414905285365
Packaging GTIN PL4	06414905285372
Item Unit Height	16 mm
Item Unit Weight	0,1 kg
Item Unit Width	16 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb