


Uponor Klett Comfort Pipe PLUS 16x2,0 240m

1087302

- UFH pipe made of PEX-a, with Klett hook tape
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

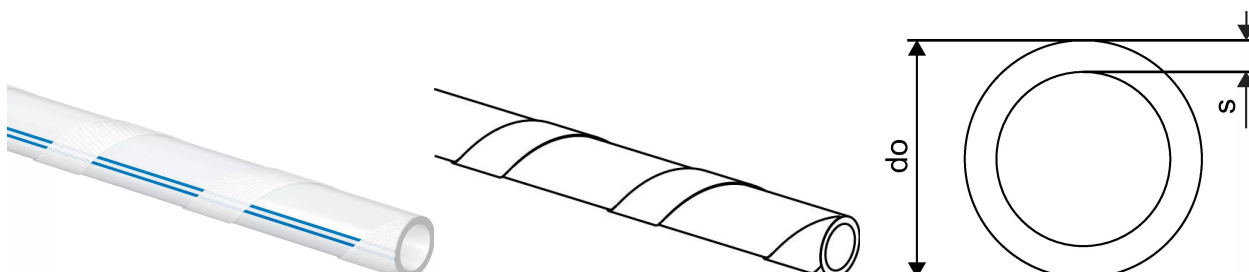

About Uponor Klett Comfort Pipe PLUS

Specification

- Klett underfloor heating panel system, consists of Klett-foil for hook- and loop fixation laminated onto EPS according to EN 13163 and DIN 4108-10.
- based on hook- and loop fixation of Klett-pipes to insulation panels
- EN 13501-1 fire classification: class E
- standard flammability, building-material class B2, conforming to DIN 4102
- with self-adhesive tape at long side
- foil on the panel is printed with 100x100mm grid pattern

Application



- radiant underfloor heating and cooling
- for use with cement- and anhydrite-based screeds

Certification


- DIN CERTCO: 3V372 PE-Xa; 7F235-F; 7F236-F; 7F342-F

Uponor Klett Comfort Pipe PLUS 16x2,0 240m

1087302

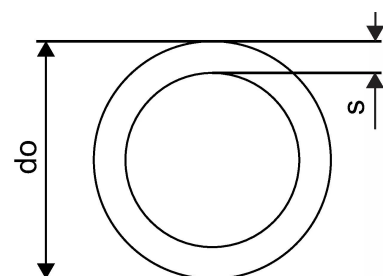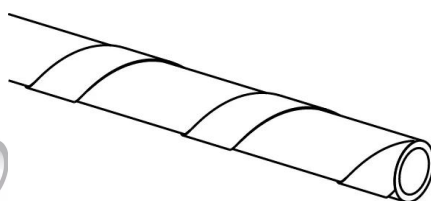

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb