
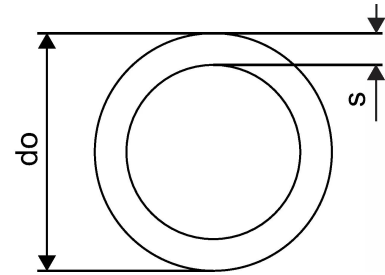


## Uponor Klett Comfort Pipe PLUS 16x2,0 640m

1087303

- UFH pipe made of PEX-a, with Klett hook tape
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

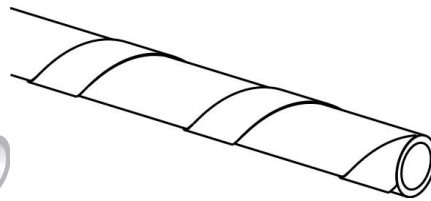

### About Uponor Klett Comfort Pipe PLUS

#### Specification

- Klett underfloor heating panel system, consists of Klett-foil for hook- and loop fixation laminated onto EPS according to EN 13163 and DIN 4108-10.
- based on hook- and loop fixation of Klett-pipes to insulation panels
- EN 13501-1 fire classification: class E
- standard flammability, building-material class B2, conforming to DIN 4102
- with self-adhesive tape at long side
- foil on the panel is printed with 100x100mm grid pattern

#### Application



- radiant underfloor heating and cooling
- for use with cement- and anhydrite-based screeds

#### Certification

- DIN CERTCO: 3V372 PE-Xa; 7F235-F; 7F236-F; 7F342-F

## Uponor Klett Comfort Pipe PLUS 16x2,0 640m

1087303

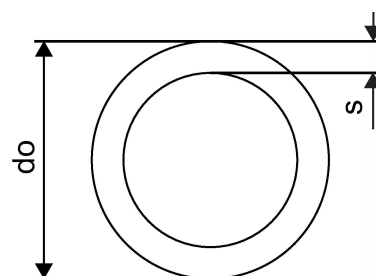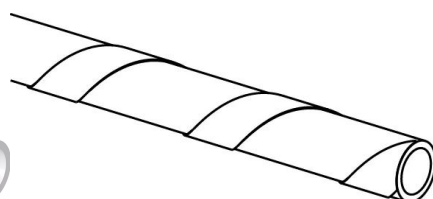

### Technical data

Item no EAN	6414905238255
Item no GTIN	06414905238255
RSK no.	2717493
Item no NRF	8361313
Item (unit of measurement)	m
Packaging Quantity 3	640
Packaging Quantity 4	1280
Packaging GTIN PL3	06414905285389
Packaging GTIN PL4	06414905285396
Item Unit Height	16 mm
Item Unit Weight	0,101 kg
Item Unit Width	16 mm

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)