


Uponor Vario S valve LS

1088056

- Flow valve insert for Vario S manifold (spare part)

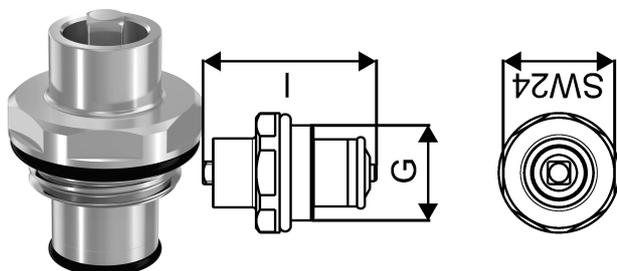

About Uponor Vario S valve LS

Specification


- Made of stainless steel, with integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill & drain points in supply/return
- Loop connection G3/4" Eurocone c-c 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- For use with with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S valve LS

1088056

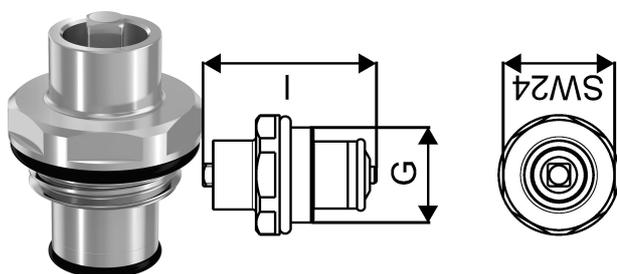

Measurements

Cylindric_thread_G	1/2
LENGTH_L	37,5

Product code

Item no EAN	6414905236183
Item no GF	35001088056
Item no GTIN	06414905236183
Item no LVI	2022150
Item no VVS	046230400

Dimensions

Item Unit Height	25
Item Unit Length	40
Item Unit Weight	0,1
Item Unit Width	25
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905233182
Packaging Height PL1	110
Packaging Length PL1	190
Packaging Quantity PL1	10
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,002926
Packaging Weight PL1	1,01
Packaging Width PL1	140

Technical documents

Download documents here

www.uponor.com/en-gb