


Uponor Vario S manifold FM 14x3/4 Euro

1088865

- Supply with flow meter for balancing and shutoff
- Return with valves and caps

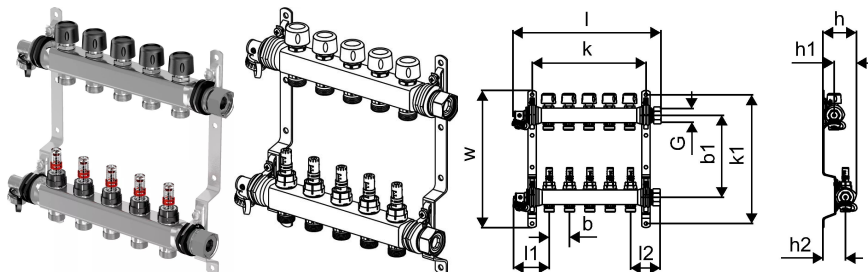

About Uponor Vario S manifold FM

Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold FM 14x3/4 Euro

1088865

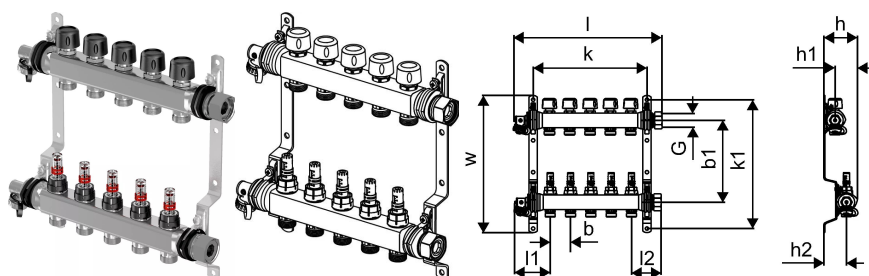

Technical data

Item no EAN	6414905243037
Item no GTIN	06414905243037
Item (unit of measurement)	pce
Length (l)	810 mm
Length (l1)	87 mm
Length (l2)	73 mm
Z-measurement b	50 mm
Z-measurement b1	215 mm
Z-measurement h	75 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	830 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	36
Packaging GTIN PL1	06414905475285
Packaging GTIN PL4	06414905475292
Item Unit Height	75 mm
Item Unit Weight	7,9 kg
Item Unit Width	235 mm

Technical documents

[Download documents here](#)

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb