


Uponor Vario PLUS actuator PRO 24V 1W NC VA02 MT 30x1,5

1090262

- interface between existing third-party manifolds and Uponor
- open/closed indicator
- first open function
- Autobalancing functionality for new and retrofit installations
- temperature range: 0°C ... +60°C
- height: 58mm + adaptor ring
- stroke length: 5mm
- connection cable: 2x 0.75mm²x1m
- diameter: 44.3mm
- conformity: EAC
- protection class: IP54
- color: blue

Consisting of:

- Vario PLUS actuator
- bayonet manifold valve adaptor ring M30x1.5mm
- mounting instructions

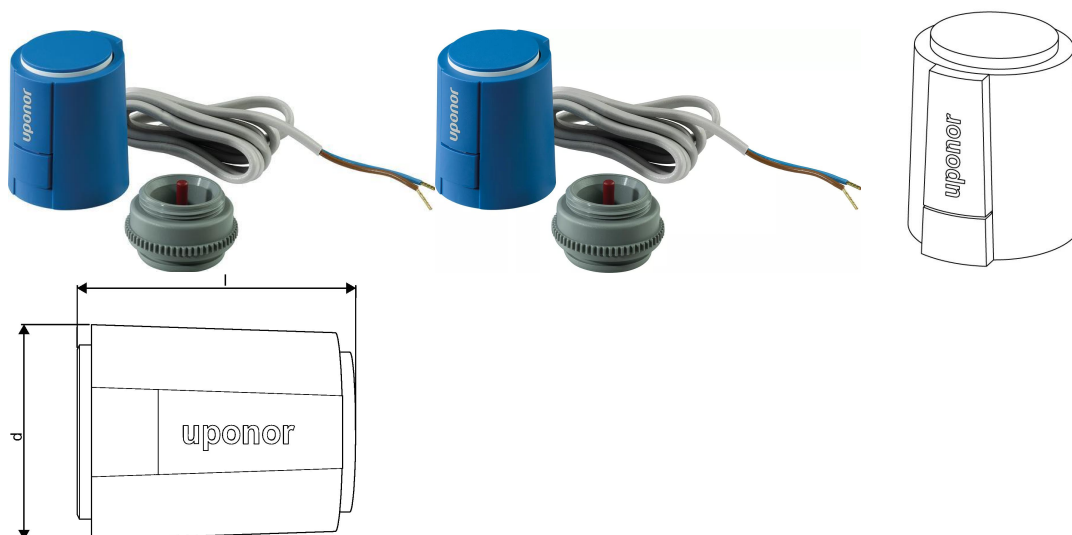

About Uponor Vario PLUS actuator PRO 24V 1W NC

Specification

- Modular fibre glass reinforced polyamide manifold with 1,3,4,6 loops for connection with basic kit
- connection right or left with flat sealing or connection from below with optional elbowset
- supply with lockshield (LS) valve for balancing with adjusting ring or supply with Flowmeter (FM) for balancing
- shut-off and flow view
- adjusting ring for balancing without tools
- prepared places for room name labels
- return with valves and caps, prepared for actuators
- loop connection G3/4" eurocone
- loop pitch 50 mm
- header pitch 225 mm

Actuator:

- NC (normally closed) = closes without power

Application


- for underfloor heating and cooling
- combineable with actuators MT 30x1,5

Certification

- CE

Uponor Vario PLUS actuator PRO 24V 1W NC VA02 MT 30x1,5

1090262

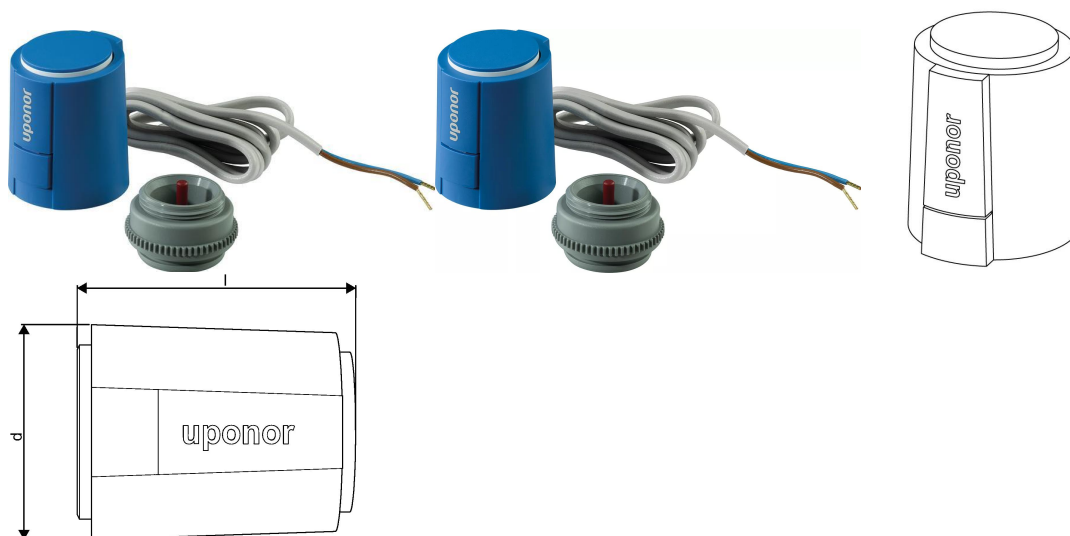

Technical data

Item no EAN	6414905217939
Item no GTIN	06414905217939
Item no VVS	466235124
RSK no.	2987936
Item no NRF	8361105
Item no LVI	2024324
Item (unit of measurement)	pce
Packaging Quantity 1	1
Packaging Quantity 4	100
Packaging Quantity 4	2000
Item Replacement 1	1141679
Packaging GTIN PL1	06414905441242
Packaging GTIN PL2	06414905443208
Packaging GTIN PL4	0641490555239
Item Unit Height	58 mm
Item Unit Weight	0,114 kg
Item Unit Width	85 mm

Technical documents

Download documents here

Enquiries.uk@uponor.com

www.uponor.com/en-gb