


## Uponor S-Press adapter M 16-15CU-SST

1090682

- Made of Gun metal
- Contoured Aluminium-sleeve
- Fast 3-step installation (press without bevel)
- Colour code
- Coupling fit to copper and stainless steel pipes with pressing jaws type M.

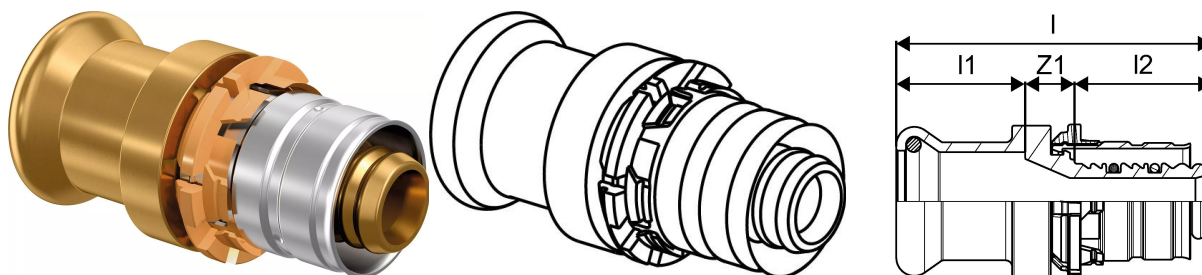

### About Uponor S-Press adapter M

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification

-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

## Uponor S-Press adapter M 16-15CU-SST

1090682

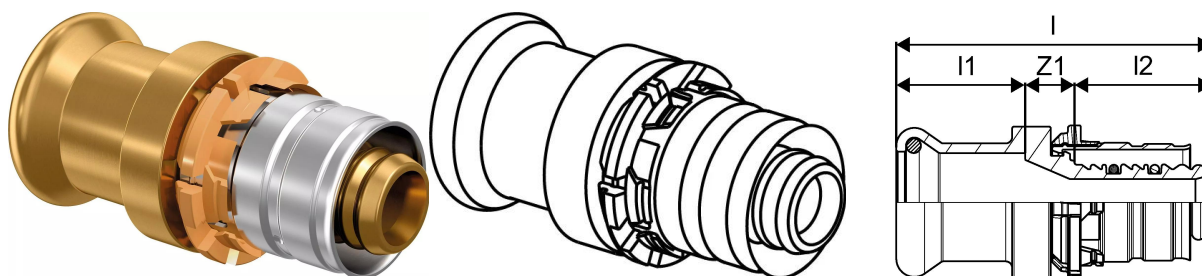

### Technical data

Item no EAN	6414905221073
Item no GTIN	06414905221073
Item no VVS	045415116
Item no LVI	1720847
Item (unit of measurement)	pce
Length (l)	49 mm
Length (l1)	20 mm
Length (l2)	21 mm
Packaging Quantity 1	1
Packaging Quantity 4	10
Packaging Quantity 4	3840
Item Replacement 1	1145403
Packaging Material short PL1	LDPE
Packaging Material short PL2	PAP
Packaging Material PL1	Low density polyethylene
Packaging Material PL2	Corrugated fibreboard
Packaging GTIN PL1	06414905268955
Packaging GTIN PL2	06414905270910
Packaging GTIN PL4	06414905276776
Item Unit Height	24 mm
Item Unit Weight	0,047 kg
Item Unit Width	24 mm

### Technical documents

Download documents here

[E\\_enquiries.uk@uponor.com](mailto:E_enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)