


Uponor S-Press adapter M 25-22CU-SST

1090684

- Made of Gun metal
- Contoured Aluminium-sleeve
- Fast 3-step installation (press without bevel)
- Colour code
- Coupling fit to copper and stainless steel pipes with pressing jaws type M.

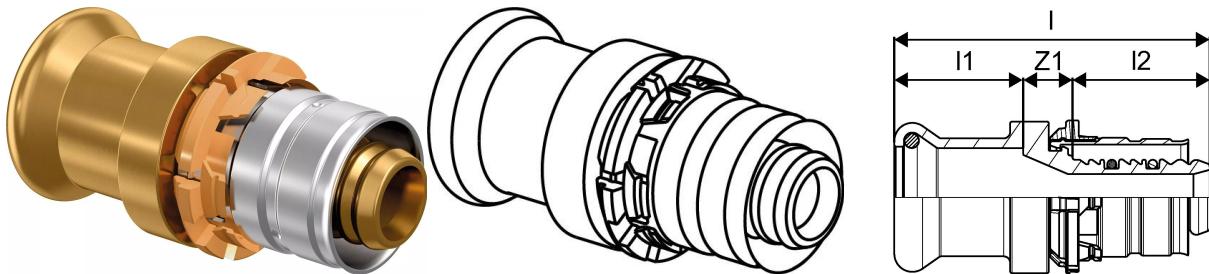

About Uponor S-Press adapter M

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

Uponor S-Press adapter M 25-22CU-SST

1090684

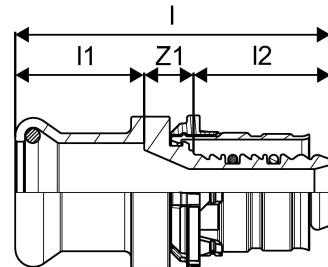

Product code

Item no EAN	6414905221097
Item no GTIN	06414905221097
Item no LVI	1720849
Item no VVS	045415125
Item Replacement 1	1145405

Dimensions

Item Unit Height	32
Item Unit Length	61
Item Unit Weight	0,098
Item Unit Width	32
Item_UOM	pce

Measurements

LENGTH_L	61
Length (I1)	23
Length (I2)	30,3
z1	7,7

Technical data

Recycling Text Block PL1	Low density polyethylene
Recycling Text Block PL2	Corrugated fibreboard

Packaging

Packaging GTIN PL1	06414905268979
Packaging GTIN PL2	06414905270934
Packaging GTIN PL4	06414905276790
Packaging Height PL1	32
Packaging Height PL2	89
Packaging Height PL4	714
Packaging Length PL1	61

Packaging Length PL2	176
Packaging Length PL4	1200
Packaging Material (number) PL1	4
Packaging Material (number) PL2	20
Packaging Material PL1	Low density polyethylene
Packaging Material PL2	Corrugated fibreboard
Packaging Material (short) PL1	LDPE
Packaging Material (short) PL2	PAP
Packaging Quantity PL1	1
Packaging Quantity PL2	5
Packaging Quantity PL4	1920
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000062464
Packaging Volume PL2	0,001049488
Packaging Volume PL4	0,68544
Packaging Weight PL1	0,098
Packaging Weight PL2	0,49
Packaging Weight PL4	213,16
Packaging Width PL1	32
Packaging Width PL2	67
Packaging Width PL4	800

Status

Until stocks last	Until stocks last
-------------------	-------------------

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb