


## Uponor Thermatop M 950x277mm

1090933


- Emitter made of 16 x 2,0 mm Uni Pipe PLUS with 10 pipe rows and up to 37,3 m per m<sup>2</sup> module.
- For grid distances of CD-profiles of 333mm
- The pipe is 100% diffusion-resistant according to DIN 4726.
- Cooling capacity according to EN 14240 (8K) up to 67 W/m<sup>2</sup>
- Heating capacity according to EN 14037 (15K) up to 105 W/m<sup>2</sup>.
- Sound absorption according to DIN EN ISO 354 with  $\alpha_w$  between 0,60 to 0,65.
- Capacity and acoustic values depending on gypsum board.

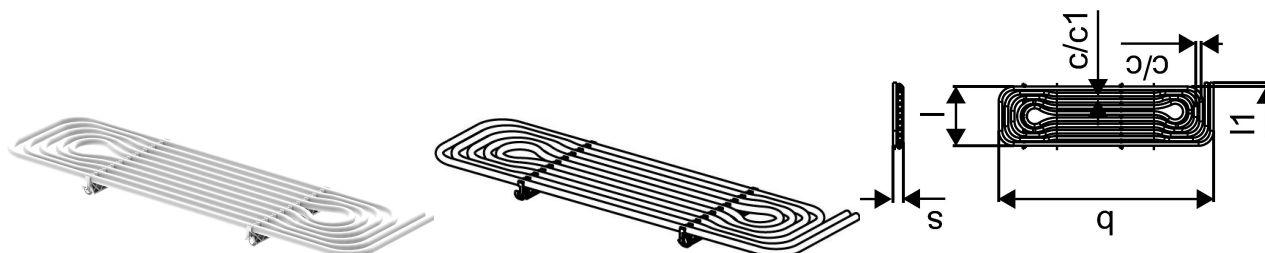

No about information

## Uponor Thermatop M 950x277mm

1090933

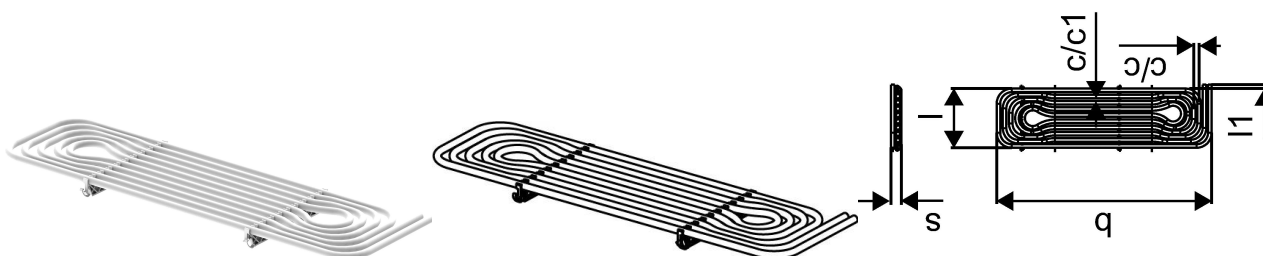

### Technical data

Item no EAN	6414905221981
Item no GTIN	06414905221981
Item (unit of measurement)	pce
Distance_center_center	24 mm
Distance_center_center_1	28 mm
Length (l)	277 mm
Length (l1)	17 mm
Z-measurement b	950 mm
Packaging Quantity 1	10
Packaging Quantity 4	200
Packaging GTIN PL1	06414905269273
Packaging GTIN PL4	06414905277117
Item Unit Height	39 mm
Item Unit Weight	1,19 kg
Item Unit Width	277 mm

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)