

## Uponor Combi Port M-Pro Rail+valves Bottom x9,DN20,MT/FT

**1093812**

Mounting rail including set of preinstalled ball valves


Dimensioning codes:

x7/x9 – quantity of ball valves included in set (7 or 9 pcs)

DN20 – ball valve size

MT – male thread connection

FT – female thread connection

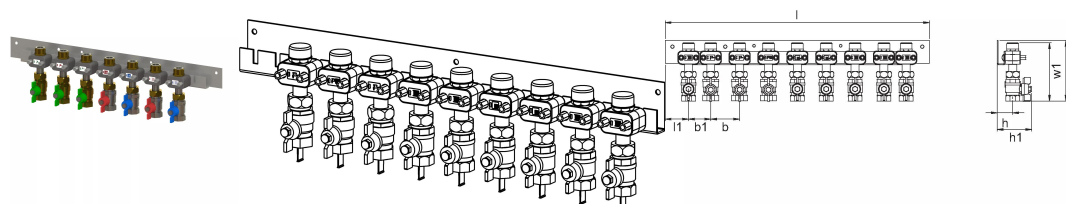

## About Uponor Combi Port M-Pro Rail+valves Bottom

### Specification

- port completely assembled and pressure tested
- technical limits of use in water for heating and plumbing are shown in technical data sheets
- pipe clamps made of plastic for sound protection and thermal decoupling
- DVGW certified PM Valve with patented triple-sealing technology
- thermal insulation at the supply pipes
- thermostatic bypass valve
- cold water outlet
- spacer for heat meter 110 mm x3/4"
- spacer for water meter 110 mm x3/4"
- venting and drainage valve
- strainer for cold water 0,5 mm
- strainer for primary heating supply line 0,5 mm
- Connection possibility (marked) of an electrical earthing lug
- max. operating pressure heating: PN10
- max. operating pressure sanitary: PN10
- max. operating temperature: 85 °C
- max. differential pressure primary heating: 2,5 bar
- min. pressure sanitary: 2,0 bar
- fitting material sanitary: CW617N
- fitting material heating: CW617N, CW614N
- pipe material: stainless steel 1.4401
- measurements: W/H/D 556 x 620 x 110 mm

### Application


- Decentralized instantaneous domestic hot water generation
- Underfloor heating systems
- Radiator heating systems

### Certification

- DVGW approval

## Uponor Combi Port M-Pro Rail+valves Bottom x9,DN20,MT/FT

1093812

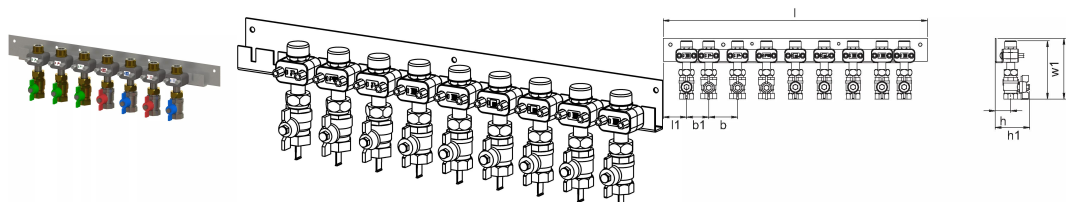

### Technical documents

Download documents here [↓](#)

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)