


Uponor Ecoflex Thermo Twin HP 2x32x2,9-2x32x3,5/140

1093894

- Point-to-point heat-pump connection pipe, heating and cooling
- Two PE-Xa carrier pipes with oxygen barrier, SDR 11
- Oxygen tightness to ISO 17455 and DIN 4726
- Two cable conduits for power and data cables
- Max. load 6 bar / 80°C
- Coloured centre profile to identify flow and return lines
- PEX foam, HDPE casing

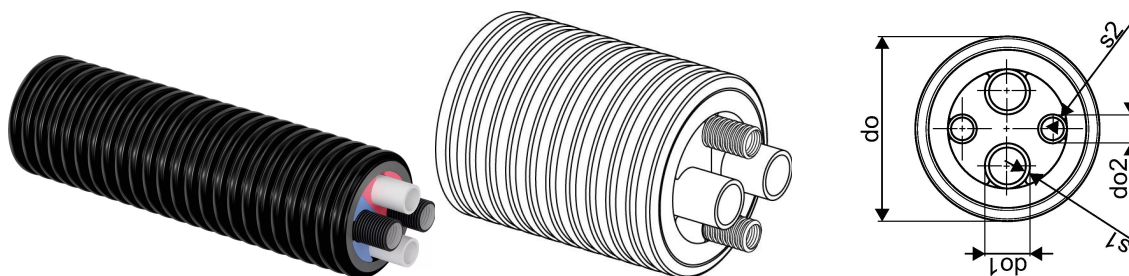

About Uponor Ecoflex Thermo Twin HP

Specification

- Heating and Cooling
- PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

Application


- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

Certification

-

Uponor Ecoflex Thermo Twin HP 2x32x2,9-2x32x3,5/140

1093894

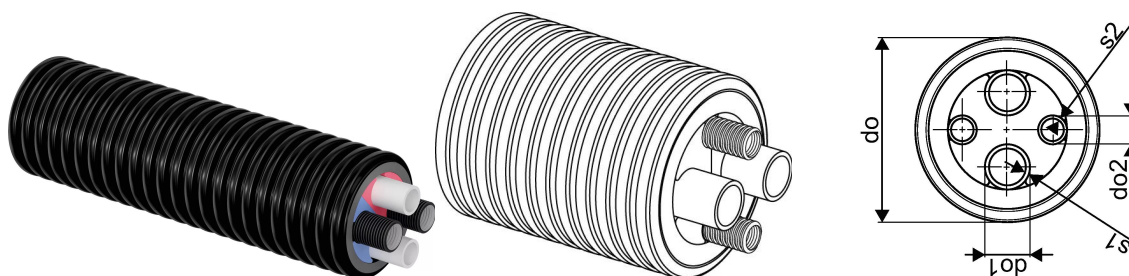

Measurements

Bending radius M	0,5
Length	200
Outer Diameter_do	140
Outer Diameter_do1	32
Outer Diameter_do2	32
Wall thickness_s1	2,9
Wall thickness_s2	3,5

Product code

Item no EAN	6414905231607
Item no GF	35001093894
Item no GTIN	06414905231607
Item no LVI	3010125
Item no RSK	2266306
Item no VVS	087808132

Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,655
Item Unit Width	140
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905473526
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26

Packaging Weight PL1	331
Packaging Width PL1	1500

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb