


Uponor Ecoflex Thermo Pipe Twin HP 2x40x3,7-2x32x3,5/175

1093895

- Point-to-point heat-pump connection pipe, heating and cooling
- Two PE-Xa carrier pipes with oxygen barrier, SDR 11
- Oxygen tightness to ISO 17455 and DIN 4726
- Two cable conduits for power and data cables
- Max. load 6 bar / 80°C
- Coloured centre profile to identify flow and return lines
- PEX foam, HDPE casing

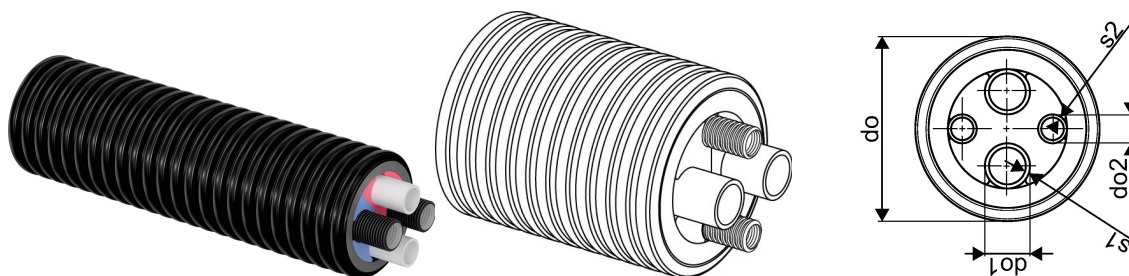

About Uponor Ecoflex Thermo Pipe Twin HP

Specification

- Heating and Cooling
- PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

Application


- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

Certification

-

Uponor Ecoflex Thermo Pipe Twin HP 2x40x3,7-2x32x3,5/175

1093895

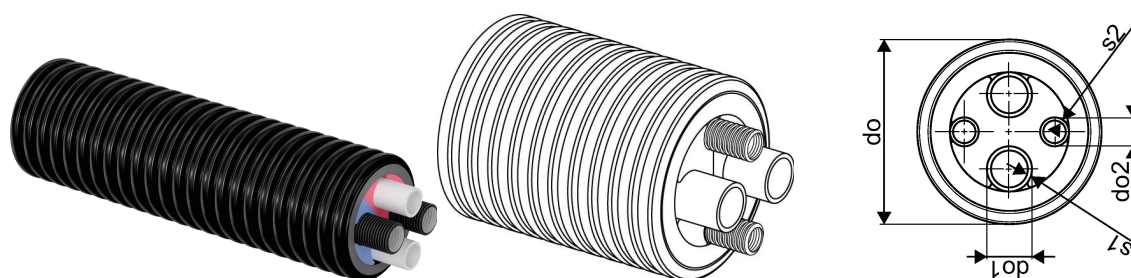

Measurements

Bending radius M	0,8
Outer Diameter_do	175
Outer Diameter_do1	40
Outer Diameter_do2	32
Wall thickness_s1	3,7
Wall thickness_s2	3,5

Product code

Item no EAN	6414905231614
Item no GF	35001093895
Item no GTIN	06414905231614
Item no LVI	3010126
Item no NRF	8360947
Item no RSK	2266307
Item no VVS	087808133

Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	2,605
Item Unit Width	175
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905473519
Packaging Height PL1	2400
Packaging Length PL1	2400
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	10,368

Packaging Weight PL1

521

Packaging Width PL1

1800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212

E

customerservice.uk.bfs@georgfi
scher.com