
Product data sheet



GF Uponor MLC white insulated S13 BL-S2-D0 20x2,25 blue 75m

1093954

- Coil
- Pre-insulated, with foil vapour barrier
- Fire class Bl- s1, d0 to BS EN 13501-1 (Insulation - foam & vapour barrrier)

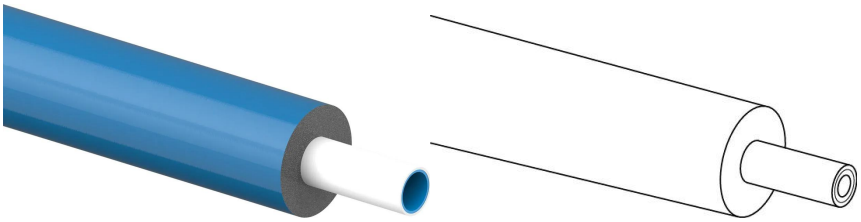

About GF Uponor MLC white insulated S13 BL-S2-D0

Specification

Uponor MLC (Multi Layer Composite).

- PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe , bonded to an inner layer of Polyethylene Raised Temperature (PE-RT), and an outer layer of white Polyethylene Raised Temperature (PE-RT).
- 100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726
- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data, in accordance with the requirements of the standard.
- Sizes 12 - 32mm supplied as flexible coils, or 40-110mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor MLC white insulated S13 BL-S2-D0 20x2,25 blue 75m

1093954

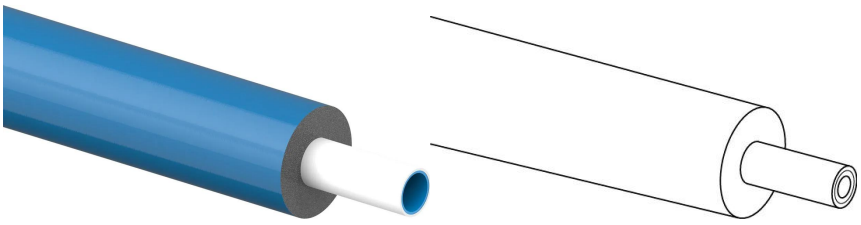

Product code

Item no EAN	6414905232062
Item no GTIN	06414905232062

Dimensions

Item Unit Height	46
Item Unit Length	1000
Item Unit Weight	0,1831
Item Unit Width	46
Item_UOM	m

Measurements

Outer Diameter_do	20
Z MEASUREMENT S	2,25

Packaging

Packaging GTIN PL1	06414905441990
Packaging GTIN PL4	06414905232154
Packaging Height PL1	310
Packaging Height PL4	2000
Packaging Length PL1	1140
Packaging Length PL4	1140
Packaging Quantity PL1	75
Packaging Quantity PL4	450
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,402876
Packaging Volume PL4	2,5992
Packaging Weight PL1	17,035
Packaging Weight PL4	112,709

Packaging Width PL1	1140
Packaging Width PL4	1140

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+