


Uponor MLC white insulated S13 BL-S2-D0 20x2,25 blue 75m

1093954

- Coil
- Pre-insulated, with foil vapour barrier
- Fire class BI- s1, d0 to BS EN 13501-1 (Insulation - foam & vapour barrier)

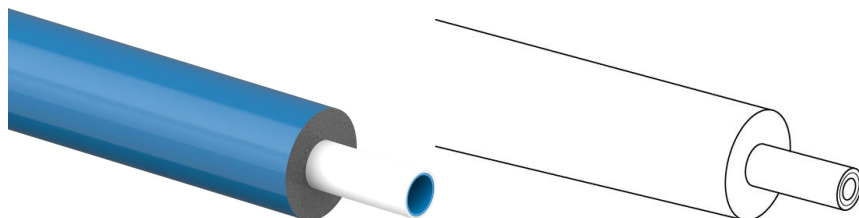

About Uponor MLC white insulated S13 BL-S2-D0

Specification

Uponor MLC (Multi Layer Composite).

- PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe , bonded to an inner layer of Polyethylene Raised Temperature (PE-RT), and an outer layer of white Polyethylene Raised Temperature (PE-RT).
- 100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726
- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data, in accordance with the requirements of the standard.
- Sizes 12 - 32mm supplied as flexible coils, or 40-110mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor MLC white insulated S13 BL-S2-D0 20x2,25 blue 75m

1093954

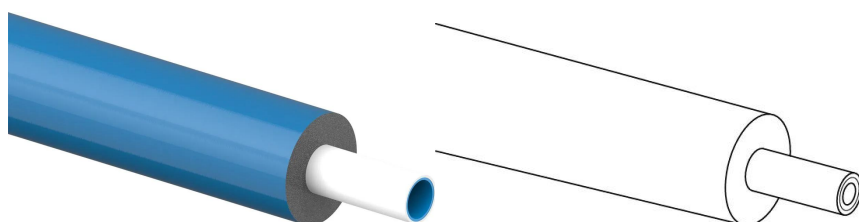

Product code

Item no EAN 6414905232062

Item no GTIN 06414905232062

Dimensions

Item Unit Height 46

Item Unit Length 1000

Item Unit Weight 0,1831

Item Unit Width 46

Item_UOM m

Measurements

Outer Diameter_do 20

Z MEASUREMENT S 2,25

Packaging

Packaging GTIN PL1 06414905441990

Packaging GTIN PL4 06414905232154

Packaging Height PL1 310

Packaging Height PL4 2000

Packaging Length PL1 1140

Packaging Length PL4 1140

Packaging Quantity PL1 75

Packaging Quantity PL4 450

Packaging Type PL1 Base_Box

Packaging Type PL4 Pallet

Packaging Volume PL1 0,402876

Packaging Volume PL4 2,5992

Packaging Weight PL1 17,035

Packaging Weight PL4 112,709

Packaging Width PL1 1140

Packaging Width PL4 1140

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb