


Uponor Fluvia T pump Grundfos Push-12

1095132

- For Uponor Fluvia T Pumpgroup PUSH-12 AC-G / WL-G / TH-G / CH-G

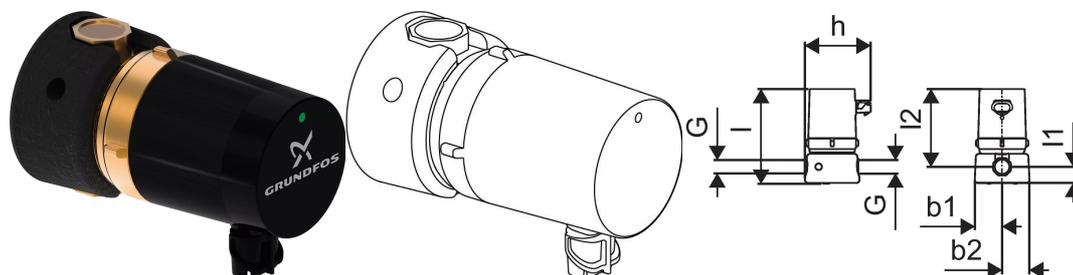

About Uponor Fluvia T pump Grundfos Push-12

Specification


- Integrated pump: Q: 0,1 - 0,4 m³/h, H: 0,2 - 1,1 m, Phyd< 1W
- Bracket for left or right installation
- Air bleed screw
- Secondary circuit temp. range 20-50°C
- Balancing valve
- Secondary loop 3/4" Eurocone
- Primary valves with clamp connection for CU-Pipe 15mm

Application

- For control of UFH in small zones
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C

Uponor Fluvia T pump Grundfos Push-12

1095132

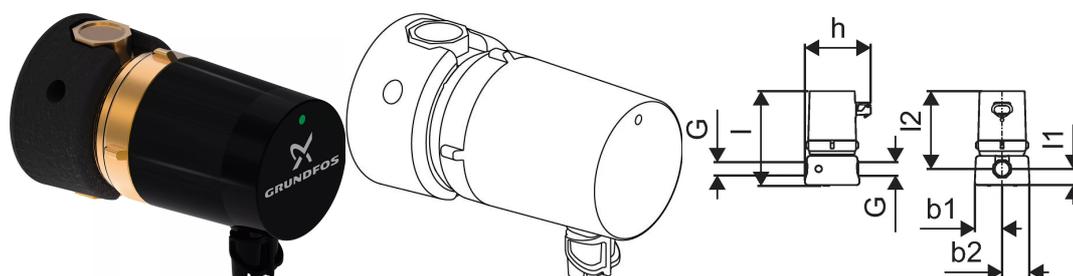

Measurements

Cylindric_thread_G	1/2
LENGTH_L	146
Length (l1)	25
Length (l2)	120
Z Measurement b1	42
Z Measurement b2	42
Z Measurement h	101

Product code

Item no EAN	6414905428656
Item no GTIN	06414905428656
Item no LVI	2025039
Item no NRF	8361167
Item no RSK	2988791
Item no VVS	381121950

Dimensions

Item Unit Height	82.5
Item Unit Length	145.5
Item Unit Weight	0,4500
Item Unit Width	100
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905475803
Packaging GTIN PL2	06414905475797
Packaging GTIN PL4	06414905475810
Packaging Height PL1	80
Packaging Height PL2	205
Packaging Height PL4	820

Packaging Length PL1	160
Packaging Length PL2	395
Packaging Length PL4	800
Packaging Quantity PL1	1
Packaging Quantity PL2	20
Packaging Quantity PL4	320
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001216
Packaging Volume PL2	0,023887625
Packaging Volume PL4	0,3936
Packaging Weight PL1	0,5000
Packaging Weight PL2	10,3000
Packaging Weight PL4	165,0000
Packaging Width PL1	95
Packaging Width PL2	295
Packaging Width PL4	600

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb