

Uponor Combi Port M-ProX HeatInterface IH 15 CB BP DI TL ZH CR NI NC

1095636

IH version for domestic hot water and indirect heating systems using second heat exchanger with heating circuit connections including heating pump and expansion tank mounted on the side of heat interface unit.

Dimensioning codes:

15, 21 – domestic hot water capacity indication (l/min)

CB – copper brazed stainless steel heat exchanger for domestic hot water preparation

BP – supply lines preheating function

DI – primary differential pressure controller at the heat interface unit inlet


TL – thermostatic temperature limiter for domestic hot water with submersible sensor

ZH – apartment heating circuit circulation arrangement, including circulation pump, thermostatic flow controller and expansion tank

CR – heat interface metal cover casing white powder coated (RAL 9016)

NI – no pipe insulation and/or insulated cover

NC – no cold water outlet from heat interface unit

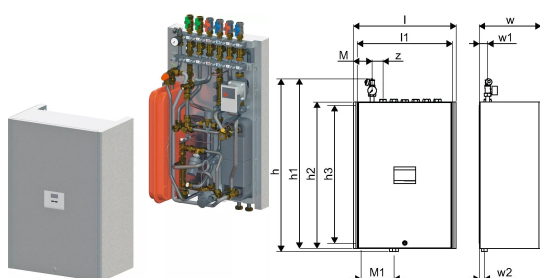

About Uponor Combi Port M-ProX HeatInterface IH

Specification

- port completely assembled and pressure tested
- DVGW certified PM Valve with patented triple-sealing technology
- pipe clamps made of plastic for sound protection and thermal decoupling
- 2 heat exchangers: for heating and domestic hot water
- thermostatic bypass valve
- secondary heating circulation pump with temperature control
- spacer for heat meter 110 mm x3/4"
- spacer for water meter 110 mm x3/4"
- fill and drain valve
- strainer for cold water 0,5 mm
- strainer for primary heating supply line 0,5 mm
- connection possibility (marked) of an electrical earthing lug
- max. operating pressure heating: PN10
- max. operating pressure sanitary: PN10
- max. operating temperature: 85 °C
- min. pressure primary sanitary: 2 bar
- max. differential pressure primary heating: 2,5 bar
- fitting material sanitary: CW617N
- fitting material heating: CW617N, CW614N
- pipe work: stainless steel 1.4401
- including cabinet cover, white powder coated (RAL 9016)


Application

- Decentralized instantaneous domestic hot water generation
- Underfloor heating systems
- Radiator heating systems

Certification

- DVGW approval

Uponor Combi Port M-ProX HeatInterface IH 15 CB BP DI TL ZH CR NI NC 1095636

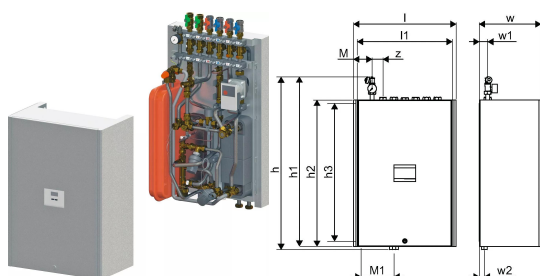

Technical documents

Download documents here [↓](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb