


## Uponor Ecoflex VIP Thermo Single 63x5,8/140

1095716

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- VIP + PEX foam, HDPE casing

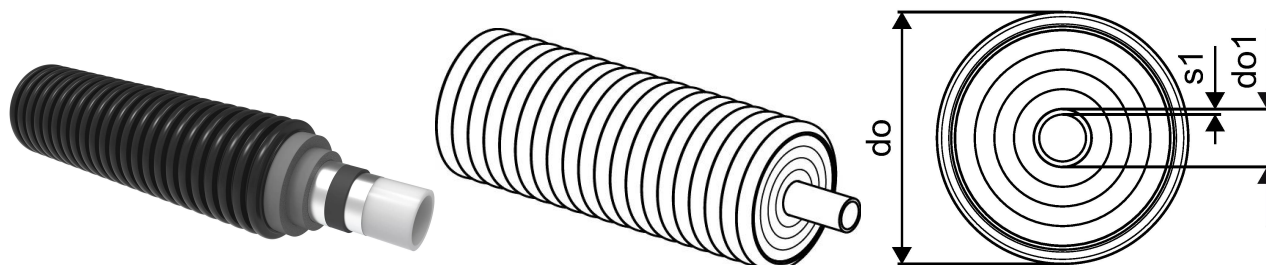

### About Uponor Ecoflex VIP Thermo Single

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural colored, PN 6 (SDR 11), Oxygen tightness based on EN 15632
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex VIP Thermo Single 63x5,8/140

1095716

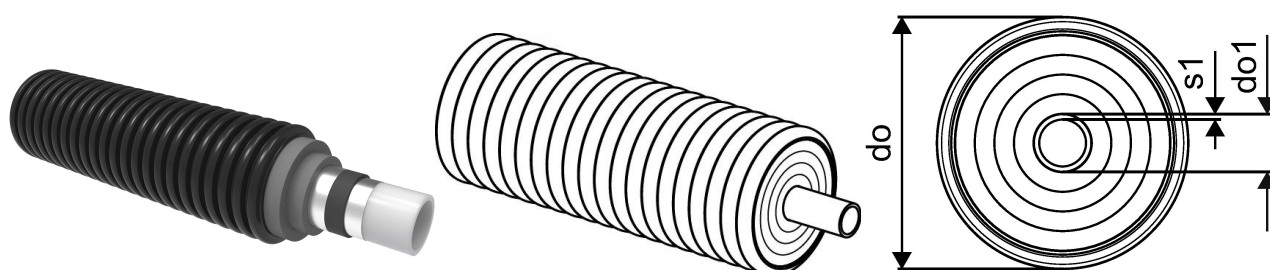

### Technical data

Item no EAN	6414905479153
Item no GTIN	06414905479153
Item no VVS	087808263
RSK no.	2266362
Item no NRF	8360952
Item no LVI	3010237
Item (unit of measurement)	m
Bending radius 2	0,5 m
Packaging Quantity 1	200
Packaging GTIN PL1	06414905479696
Item Unit Height	140 mm
Item Unit Weight	2,35 kg
Item Unit Width	140 mm

### Technical documents

[Download documents here](#)

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)