


Uponor Ecoflex VIP Thermo Single 110x10,0/175

1095719

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- VIP + PEX foam, HDPE casing

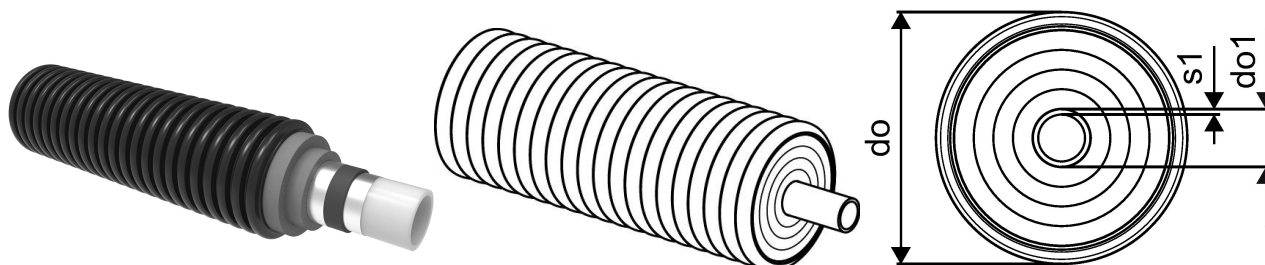

About Uponor Ecoflex VIP Thermo Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural colored, PN 6 (SDR 11), Oxygen tightness based on EN 15632
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex VIP Thermo Single 110x10,0/175

1095719

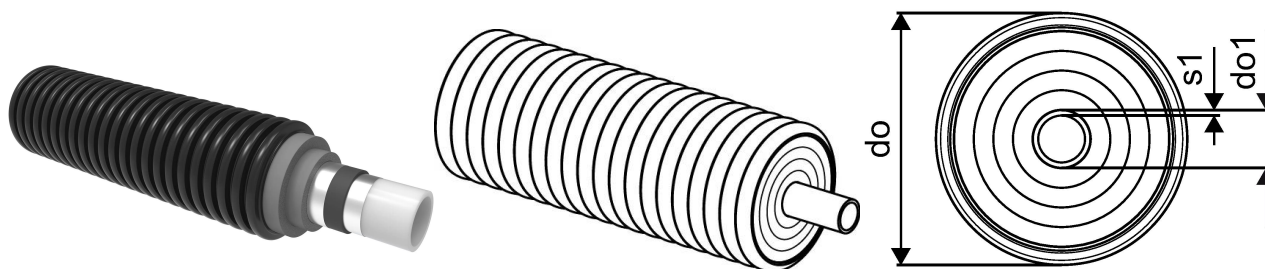

Technical data

Item no EAN	6414905479184
Item no GTIN	06414905479184
Item no VVS	087808310
RSK no.	2266365
Item no NRF	8360955
Item no LVI	3010240
Item (unit of measurement)	m
Bending radius 2	0,9 m
Packaging Quantity 1	150
Packaging GTIN PL1	06414905640263
Item Unit Height	175 mm
Item Unit Weight	5,06 kg
Item Unit Width	175 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb