


## Uponor Ecoflex Supra Pipe 25x2,3/68

**1095722**

- Cold potable water and cooling
- One medium pipe PE 100 RC black, SDR 11
- Max. load 16 bar / 20°C
- PEX foam, HDPE casing

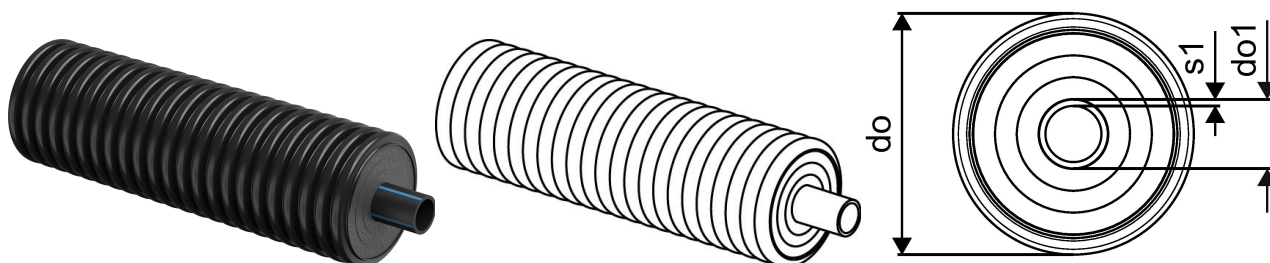

### About Uponor Ecoflex Supra Pipe

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Carrier pipe: Polyethylene PE100 RC, PN 16 (SDR 11) black with blue stripes
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application

- Transport of cold potable or cooling water for buried installations.
- Operating temperature +20°C
- Static verification for heavy traffic load of 60 tons

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor Ecoflex Supra Pipe 25x2,3/68

1095722

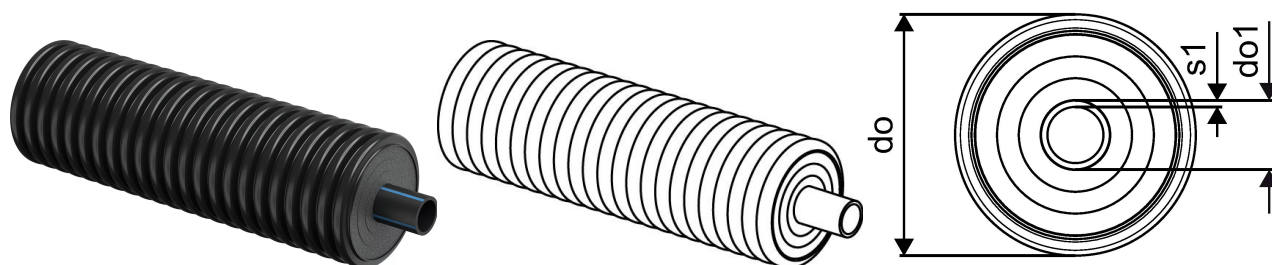

### Measurements

Bending radius M	0,3
Outer Diameter_do	68
Outer Diameter_do1	25
Wall thickness_s1	2,3

### Product code

Item no EAN	6414905485604
Item no GF	35001095722
Item no GTIN	06414905485604
Item no NRF	8361424

### Dimensions

Item Unit Height	68
Item Unit Length	1000
Item Unit Weight	0,52
Item Unit Width	68
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905537884
Packaging Height PL1	1600
Packaging Length PL1	1600
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	1,8944
Packaging Weight PL1	104
Packaging Width PL1	740

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212

E  
customerservice.uk.bfs@georgfi  
scher.com